

**COLUMBUS COMMON COUNCIL – COMMITTEE OF THE WHOLE  
TUESDAY, JANUARY 3, 2017 – FOLLOWING REGULAR MEETING  
COLUMBUS CITY HALL  
AGENDA**

1. Roll Call
2. Notice of Open Meeting
3. Approve Agenda
4. Citizens Comments on agenda items
5. Discussion of snowmobile trail
6. Discussion of change order to filter influent pump improvements – Dave Arnott
7. Draft ordinance to repeal and recreate part of Chapter 82 concerning the collection and disposal of solid waste
8. Consider information on purchase of 2 dump-plow trucks for Department of Public Works
9. Consider lease of 2 squads for Police Department
10. Adjourn

# 2017 AGENDA ITEM

**MEETING DATE:** January 3, 2017

**AGENDA ITEM:** Discussion of snowmobile trail

## **DETAILED DESCRIPTION OF SUBJECT MATTER:**

Based off of the comments shared by Mr. Mario Quintana at the December 20th Council meeting, the issue of the snowmobile trail is on the Committee of the Whole for review and discussion. You may recall their concerns about being new homeowners to that area and particularly how close the trail comes up to their rear property area.

While the trail for this winter season had been previously approved earlier last fall, the concerns shared has prompted a need to review the trail over near the area behind the water tower. I have left the title of the agenda item vague so that opportunity to discuss the entire trail can be addressed.

I have been in touch with Dave Weismann throughout the time that concerns about the trail have been raised and I know he has been talking to the property owners and Alderperson Hendrickson. I have suggested a slight adjustment to the trail around the water tower as a means for separating the trail and the homes there, but at this time I do not know if there has been any progress made.

As of the writing of this memo, the trails are currently closed due to lack of snow cover. I have been in constant communication with the Police Department on the status of the trail as well.

Dave Weismann of the Snow Blazers will be made aware of this issue up on the agenda again.

## **ACTION REQUESTED OF COUNCIL:**

# AGENDA ITEM

Committee of the Whole Meeting Date: December 20, 2016

Council Meeting date: January 3, 2017

ITEM: Ordinance Change – Solid Waste

## DETAILED DESCRIPTION OF SUBJECT MATTER:

With the changes in the vendor and different approaches to waste collection, Atty Johnson has suggested that the City Ordinance on Solid Waste collection and disposal be adjusted.

Attached is the proposed Ordinance.

LIST ALL SUPPORTING DOCUMENTATION ATTACHED: Proposed Ordinance

MOTION REQUESTED OF COUNCIL: Review and Discussion of Proposed Ordinance Changes

## CITY OF COLUMBUS

### ORDINANCE \_\_\_\_\_

#### AN ORDINANCE TO REPEAL AND RECREATE CERTAIN PROVISIONS OF ARTICLE II OF CHAPTER 82 OF THE CITY CODE OF ORDINANCES GOVERNING COLLECTION AND DISPOSAL OF SOLID WASTE

The Common Council of the City of Columbus, Columbia County, Wisconsin do hereby ordain as follows:

1. Section 82-31 of the City Code of Ordinances is repealed and recreated to now read as follows:

**Sec. 82-31. Residential Garbage Collection Service.** Residential garbage collection service shall be provided by a private firm or firms pursuant to a contract with the City as approved by the Common Council. The collection of residential garbage and recycling shall be as provided in the contract with the City and as set forth in this Article II of the Code of Ordinances.

2. The following definitions set forth in Section 82-33 of the City Code are repealed and recreated to now read as follows:

Recyclable Waste includes:

- (1) Aluminum containers
- (2) Corrugated paper, cardboard or other container board
- (3) Foam polystyrene packaging
- (4) Glass containers
- (5) Magazines or other material printed on similar paper
- (6) Newspaper or other material printed on news print
- (7) Office paper
- (8) Plastic containers as identified and accepted by the firm collecting the City's solid waste as being able to be recycled
- (9) Steel containers
- (10) Containers for carbonated or malt beverages that are primarily made of a combination of steel and aluminum
- (11) Any other material identified by the firm responsible for the City's solid waste pick up that the firm indicates in writing to the City is eligible for recycling

Residential Unit. All single family residences, apartments up to 4 units, or condominium units. A single family dwelling shall be counted as one household unit, a two family dwelling shall be counted as two household units, etc.

3. Section 82-34 of the City Code is repealed and recreated to now read as follows:

**Sec. 82-34. Garbage Storage Areas.** All garbage and other solid waste shall be stored in a nuisance and odor free condition. Litter shall not be allowed to accumulate. When the City initiates collection of solid waste by use of City-provided carts, all carts shall be stored either indoors, or in the side yard or rear yard of a lot. No storage of solid waste carts shall be allowed in the front yard of a lot.

4. Section 82-35 of the City Code is repealed and recreated to now read as follows:

**Sec. 82-35. Residential Garbage Containers.**

- (a) **Approved Container.** Approved garbage bag containers shall be clear plastic bags not exceeding 35 gallons in volume or 55 pounds in weight when full. Bags shall be secured and of sufficient strength so the contents do not spill out when handled. No residence shall exceed an amount equal to three such bags.
- (b) **Solid Waste Carts.** At such time as the City begins collecting solid waste by use of carts, the City shall only pick up solid waste that is stored in a City-approved cart. Each residential unit shall be provided with two carts, one for solid waste disposal and one for the collection of recyclable material. If a cart is damaged so that the cart must be replaced, the City will provide a replacement cart to the residential unit, and will charge the residential unit the actual cost of the replacement cart. The residential unit will have 30 days following receipt of an invoice from the City to reimburse the City, and if reimbursement is not made in a timely manner, the City shall be allowed to place the remaining balance due on the real estate tax bill for the property as a special charge pursuant to §66.0627, Stats.

5. All other provisions of Chapter 82 of the City Code of Ordinances remain in full force and effect unless modified by the terms of this Ordinance.
6. **Severability.** If any portion of this Ordinance or its application on any person or circumstances is held invalid, the validity of this Ordinance as a whole or any other provision herein or its application shall not be affected.
7. **Effective Date.** This Ordinance shall take effect immediately upon its passage and publication.

Adopted this \_\_\_ day of \_\_\_\_\_, 2016.

**CITY OF COLUMBUS**

By: \_\_\_\_\_  
Kelly Crombie, Mayor

By: \_\_\_\_\_  
Anne Donahue, City Clerk

**CITY OF COLUMBUS**

FOR MEETING OF: January 3, 2017

REQUEST FROM/DEPARTMENT: Public Works

AGENDA ITEM/REQUEST: Purchase of Single Axle Truck Chassis

\*\*\*\*\*

**DESCRIPTION AND SCOPE OF PROJECT/ITEM WITH KEY ISSUES NOTED:**

The 2017 approved city budget provided funds through a proposed borrowing for the replacement of two of the Public Works Department's larger trucks. The following quotes are for a 2018 single axle cab and chassis to replace truck #47 in our fleet. These quotes **do not** include: dump box, plow and wing, salter, or hydraulics. Those items will be quoted separately after the truck manufacturer has been determined. The estimated costs to add the dump box, plow/wing, salter or hydraulics is approximately \$120,000.00 per truck.

All of the truck specs contain Cummins engines and Allison transmissions. We would also recommend purchasing the 60 month/100,000 mile extended Cummins ISL Engine Coverage Protection Plan and After Treatment Coverage for an additional \$5,300.00.

Western Star 4700SB (includes 2yr towing).....\$88,531.00

International 7500.....\$88,779.88

Kenworth T470.....\$92,500.00

**PREVIOUS ACTION TAKEN (IF APPLICABLE):**

**BUDGET AND FINANCING INFORMATION:**

Account #: \_\_\_\_\_ Department: Public Works

Acct. # Approved Budget: \_\_\_\_\_ Current Balance in Acct #: \_\_\_\_\_

Remaining Balance in Acct #: \_\_\_\_\_ (after approval)



*Single*

December 15, 2016

City of Columbus  
105 N Dickason Blvd  
Columbus , WI 53925

Dear City of Columbus,

Thank you for the opportunity to quote new chassis' to be equipped with snow plow equipment. I am confident that the Kenworth T470 would be an excellent addition to your fleet. Below you will find pricing for both a single axle and a tandem axle based on the specs included in this packet.

2018 Kenworth T470 Single Axle Sales Price: \$92,500  
2018 Kenworth T470 Tandem Axle Sales Price: \$103,800

Thank you again for the opportunity. Please do not hesitate to contact me with any questions or concerns.

Sincerely,

WISCONSIN KENWORTH

Dennis Petzke



Wisconsin Kenworth M450  
6395 Lake Rd

City of Columbus

Windsor, Wisconsin United States 53598  
Phone: (608) 846-5451  
Fax: (608) 846-2558  
Email: daniel.crombie@csctruck.com

Phone:  
Fax:  
Contact Email:  
Prepared for:

### Vehicle Summary

	Unit	Chassis	
Model:	T400 Series Conventional.	Fr Axle Load (lbs):	20000
Type:	FULL TRUCK	Rr Axle Load (lbs)	23000
Description:	T470	G.C.W. (lbs):	43001
	<b>Application</b>	Road Conditions:	
Intended Serv.:	Snowplow. Vehicles which are configured for	Class A (Highway)	80
Commodity:	Gravel/crushed rock/sand	Class B (Hwy/Mtn)	15
	<b>Body</b>	Class C (Off-Hwy)	05
Type:	End dump	Class D (Off-Road)	00
Length (ft):	12.0	Maximum Grade:	6
Height (ft):	13.5	Wheelbase (in):	177
Max Laden Weight (lbs):	4000	Overhang (in):	63
	<b>Trailer</b>	Fr Axle to BOC (in):	67
No. of Trailer Axles:	0	Cab to Axle (in):	110
Type:		Cab to EOF (in):	173
Length (ft):	0.0	Overall Comb. Length (in):	312
Height (ft):	0.0		
Kingpin Inset (in):	0	<b>Special Req.</b>	
Corner Radius (in):	0	U.S. Domestic Registry, 50-State	
	<b>Restrictions</b>		
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ <a href="http://www.paccarfinancial.com">www.paccarfinancial.com</a> .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:15:01 AM	<b>Complete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q22545332
Prepared by:	Dan Crombie		Version Number:	38.21



Wisconsin Kenworth M450  
6395 Lake Rd

City of Columbus

Windsor, Wisconsin United States 53598  
Phone: (608) 846-5451  
Fax: (608) 846-2558  
Email: daniel.crombie@csctruck.com

Phone:  
Fax:  
Contact Email:  
Prepared for:

Data	Code	Description	\$ List	Weight
<b>Model</b>				
0000410	O	<b>T400 Series Conventional.</b>	114,840	11,600
0070071	O	<b>T470 4x2 Medium Duty</b>	0	0
0080050	O	<b>CARB Idle Emissions Reduction Feature for PX-7 and PX-9</b>	100	0
0090063	O	<b>T470 4x2 Medium Duty</b>	0	0
0091042	O	<b>Gravel/crushed rock/sand</b>	0	0
0093025	O	<b>Snowplow. Vehicles which are configured for mounting a snowplow to the front. May also have dump or other body. Typically includes some operation off of paved roads. Road usage: majority of Class A &amp; B, do not code for Class D.</b>	0	0
0095010	O	<b>End dump</b>	0	0
0098025	O	<b>U.S. Domestic Registry, 50-State</b>	0	0

**Engine & Equipment**

0129569	O	<b>PACCAR PX-9 370 2017 370@2000 365@2100 1250@1400</b> Includes turbo exhaust brake, no code is used. Diagnostic Plug for data link, Oil Cooler, Aluminum Flywheel Housing. N09200 N205 120..Standard Maximum Speed Limit [LSL] N09220 N207 0....Expiration Distance N09240 P09 120...Hard Maximum Speed Limit N09260 P14 64...Maximum Accelerator Pedal Vehicle Speed N09280 P16 0....Accelerator Lower Droop N09300 P19 64...Maximum Cruise Speed N09320 C143 0....Cruise Control Lower Droop N09360 N203 252..Reserve Speed Function Reset Distance N09380 N202 0....Maximum Cycle Distance N09400 N206 10...Maximum Active Distance N09420 N201 0....Reserve Speed Limit Offset N09440 P11 NO...Engine Protection Shutdown N09460 P06 NO...Gear Down Protection N09480 P26 1400.Max PTO Speed N09500 P02 NO...Cruise Control Auto Resume N09520 P04 NO...Auto Engine Brake in Cruise N09540 N209 0....Expiration Distance N09560 P520 YES..Enable Idle Shutdown Park Brake Set N09580 P32 5....Timer Setting N09600 P233 YES..Enable Impending Shutdown Warning N09620 P234 60...Timer For Impending Shutdown Warning N09640 P516 35...Engine Load Threshold	8,183	0
---------	---	--	-------	---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
		N09680 P33 NO...Idle Shutdown Manual Override		
		N09720 P230 YES..Enable Hot Ambient Automatic Override		
		N09740 P46 40...Low Ambient Temperature Threshold		
		N09760 P56 60...Intermediate Ambient Temperature Threshold		
		N09780 P47 80...High Ambient Temperature Threshold		
1000154	O	<b>Prospector version 39.0</b> Replaces version 38.2	0	0
1000684	O	<b>Effective VSL Setting NA</b>	0	0
1000858	O	<b>Engine Idle Shutdown Timer Disabled</b>	0	0
1000859	O	<b>Enable EIST Ambient Temp Override</b>	0	0
1000860	O	<b>Enable EIST in PTO Mode</b> Use only with MX and Cummins engines	0	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0	0
1002060	S	<b>Air compressor: Cummins 18.7 CFM FOR Cummins AND PACCAR PX engines.</b>	0	0
1051092	S	<b>Engine mount Powercore air cleaner.</b> w/constant torque SS clamps, pop-up air restriction indicator. Pop-up indicator is standard.	0	0
1105230	O	<b>Fan Hub: Horton 2-Speed for ISL9, ISL-G,</b> PX-8 or PX-9	417	0
1121200	O	<b>Cooling module: 1000 square inches</b> T170/T270/T370/T470. Includes metal surge tank on T170/T270/T370.	-398	0
1247166	S	<b>EXH: RH UNDER DPF/SCR W/ RH SIDE OF CAB VERTICAL TAILPIPE WITH DAYCABS, EXTENDED DAYCABS, OR MODULAR SLEEPERS, 2017 EPA</b>	0	0
1290136	S	<b>Tailpipe: 5 in. single 36 in. 45 degree curved.</b>	0	0
1321145	O	<b>Fuel Filter:Fleetguard FS1003</b> Fuel/Water Separator for PX-9	0	0
1321200	O	<b>Run Aid:None</b> *For Fuel Filter	0	0
1321305	O	<b>Start Aid:12V Heat</b> *For Fuel Filter	46	1
1500029	O	<b>Kenworth Fuel Cooler</b> Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	191	6
1504002	O	<b>Immersion block heater 120V 1000W w/plug under door on C500, T660, T800 &amp; W900.</b>	112	0
1816260	O	<b>Alternator: PACCAR 160 amp, brush type</b>	0	0
1825623	O	<b>Batteries: 3 Optima 31A Threaded post (900)</b> 2700 CCA.	1,038	66

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
1836100	S	<b>Starter: PACCAR 12 volt electrical system. W/</b> centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1900082	O	<b>Multi-function engine connector for body builder</b> interface for Cummins.	53	0
1900089	O	<b>Connect BTWN C/I PTO SW &amp; Eng,Warn LMP use</b> 1900086 W/PTO Cntrl, REQs 1900082 OR 84	140	0
<b>Transmission &amp; Clutch</b>				
2011205	O	<b>Transmission: Allison 3000RDS 6-speed</b> w/PTO drive gear. 5th Gen controls. Includes heat exchanger & oil level sensor. Rugged Duty Series for vocational applications. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions. Requires a push button shift control code. Oil temperature gauge is standard on class 8 models.	14,056	291
2406453	O	<b>Driveline: 2 Dana SPL250XL 1 centerbearing</b> requires 3500057 interaxle driveline. Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life for life, quick disconnect end caps.	1,056	0
2410018	O	<b>Torque converter included w/Allison</b> Transmission.	0	0
2410151	O	<b>Pushbutton control center console mounted.</b> Class 8 with Allison Transmission.	0	0
2410203	O	<b>Allison FuelSense Base: Includes EcoCal, 5th Gen</b> Controls, and Dynamic Shift Sensing	0	0
2429038	O	<b>PTO adapter for front engine PTO.</b>	344	8
2429100	O	<b>Chassis will be fitted w/LH transmission PTO.</b> (PREVENTS ECU F/INTERFERING W/PTO ONLY)	0	0
2490009	O	<b>07/01/16 List Credit for code 2406453</b> 2 Dana SPL250XL D/L W/1 C/B	-151	0
<b>Front Axle &amp; Equipment</b>				
2517020	O	<b>Meritor MFS20 Front Axle rated 20K</b> 3.5in. DROP. Standard Track.	1,794	150
2607002	O	<b>Front Brakes: 14,601-22K Bendix air disc brakes.</b>	323	10
2690025	O	<b>Splined rotor for front air disc brakes for use</b> with iron hubs.	-62	0
2702020	O	<b>Front Hubs Iron hub pilot 20,000 lbs. 10 Bolt</b> 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	268	80
2741970	S	<b>ConMet PreSet Plus Hub package; front axle.</b>	0	0
2750001	S	<b>Hubcap: front vented.</b>	0	0
2769000	S	<b>Slack Adjusters included w/ front axle or brake.</b>	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 2016/15/11 8:15:01 AM Complete Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
2866020	O	<b>Front Springs: Taperleaf 20K w/ shock absorbers</b> w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. W900S only. Not available on W900L. W900B use 2866021.	1,092	241
2895202	O	<b>Dual power steering gears: 20K Sheppard M100P.</b>	1,086	70
2899336	O	<b>Power Steering Cooler: Radiator Mounted Air-to-Oil</b> 2007 and later engines only.	278	11

**Rear Axle & Equipment**

3042160	O	<b>Single Meritor R23-160 rear axle rated at 23K.</b>	-50	3
3200538	O	<b>Rear Axle Ratio - 5.38.</b>	0	0
3330004	S	<b>Single Rear Brakes 16-1/2x7 in. Bendix ES-</b> extended service S-cam.	0	0
3392007	S	<b>Single Rear Brake Drums: cast.</b>	0	0
3401010	S	<b>Single Rear Hubs: Aluminum hub pilot 23K;</b> 11-1/4 in. bolt circle.	0	0
3441971	S	<b>ConMet PreSet Plus Hub package; single rear axle.</b>	0	0
3465001	S	<b>Single Rear axle automatic slack adjusters.</b>	0	0
3485007	O	<b>Spring Brake: 3030 long stroke single 3 in.</b> travel replace standard 2-1/2 in. travel. Helps keep brakes in adjustment longer.	21	2
3490047	O	<b>Dustshields for drum brakes: all rear axles.</b>	84	11
3495226	S	<b>Bendix 4S/4M anti-lock brake system.</b>	0	0
3511080	O	<b>Meritor driver controlled differential lock for</b> single rear axle.	773	0
3636480	O	<b>Rear suspension: single Reyco 79KB taperleaf 23K.</b> Steel crossmembers & gussets, Kenworth longlife spring w/helper. Unladen Height: 11.0 in. Laden Height: 9.3 in. Not available with shocks or swaybars.	114	68

**Tires & Wheels**

4038675	O	<b>Front tires: Goodyear G296 MSA 425/65R22.5 20PR.</b> 44.4 in. diameter 20.6 in. SLR. all position. On/Off highway. Wide-base tire.	655	148
4230011	O	<b>RR: GOODYEAR G182 RSD GHG 11R22.5 16PR</b>	190	80
4900004	O	<b>Rear Tire Quantity: 4</b>	0	0
5045216	O	<b>Front wheel: Alcoa 82362 22.5x12.25 aluminum,</b> with Lvl One [TM] finish, hub pilot mount. 11400lb. maximum rating. Super single. Standard track axles may be over 102 in. w/425 tires. Air disc brake compatible.	643	-10
5245162	O	<b>Rear wheel: Alcoa 88367 22.5x8.25 aluminum with</b> Lvl One [TM] finish, hub pilot mount. 7400 lb. maximum rating. Air disc brake compatible. Code is priced per pair of wheels.	700	-88
5900004	O	<b>Rear Wheel/Rim Quantity: 4</b>	0	0

**Frame & Equipment**

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Cromble Version Number: 38.21



Data	Code	Description	\$ List	Weight
6056400	O	<b>Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in.</b> to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	337	309
6141400	O	<b>Full Steel Insert: for 10-5/8 in. or 10-3/4 in.</b> Steel 285 in. to 336 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model: T660, T680, T800, T880 = 21.26 in.; C500B = bumper setting minus 0.79 in.; W900B = 5.27 in., W900L = 1.50 in., W900S = 3.27 in.; T440/T470 50 in. bumper setting = 21.26 in., T470 73 in. bumper setting = 72.3 in.	1,431	640
6309910	O	<b>Delete bumper: Requires a bumper setting code.</b>	-305	-94
6319073	O	<b>73 in. Bumper setting. Requires a bumper code.</b>	0	0
6390033	O	<b>T470 W/ extended front frame rail. Must code</b> for rail separately.	0	0
6390110	O	<b>Mudflaps, Front: Extra wide for use w/ tires that</b> are wide base singles.	55	6
6405000	O	<b>In-cab steel battery box: under rider seat or in</b> stand alone box. Requires appropriate AGM battery code, which varies by model, and appropriate rider seat code be selected prior to entering the workscreen. Includes 1 battery disconnect switch.	1,704	-9
6409906	O	<b>In-Cab battery box location: Under rider seat.</b>	0	0
6451090	S	<b>T470,C5, T6, T8 non-polished DPF/SCR or CNG cover</b> diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components.	105	30
6490416	O	<b>Heavy-duty rear cab supports: W/steel</b> crossmembers & aluminum gussets.	96	26
6721125	O	<b>Delete Mudflap Arms: dealer/customer responsible</b> for installation of arms.	-27	-12
6723000	O	<b>Delete Mudflap Shields-Dealer/Customer</b> responsible for installation of shields.	0	-8
6742009	S	<b>Square end-of-frame w/ o crossmember;non-towing.</b>	0	0
<b>Fuel Tanks &amp; Equip</b>				
7210075	O	<b>Fuel Tank: 75 US gallon 24.5in. aluminum under</b> replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	377	-33

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
7722005	O	<b>DEF tank 6.9 clear BOC [CBOC], requires LH under cab fuel tank.</b> This tank has 6.9 gallons of useable volume. The tank will be located inboard of the LH under cab fuel tank. There is no frame space required to locate this tank. Not for use on sleeper chassis. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	40	-23
7889203	O	<b>Standard DEF to fuel fill ratio: 2:1 or greater.</b>	0	0
7889604	O	<b>DEF tank location is on the LH.</b>	0	0
7920075	O	<b>Location: 75 gal fuel tank LH under cab</b>	0	0
<b>Cab &amp; Equipment</b>				
8024310	S	<b>Cab: Curved Glass Conventional.</b> Cab Includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinges. Single electric horn standard. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics. Warning alarm will sound when lights are left on.	0	0
8090410	O	<b>Hood: T470 Sloped Hood for straight rail.</b> Includes radiator mounted grille, split fenders, mudflaps, & separate bumper.	531	0
8108010	S	<b>Cab heater: W/integral defrosters &amp; A/C 45,000</b> btu cab heater. No sleeper heater/AC. Includes 5 mode rotary control. T660 include filter media.	0	0
8201013	S	<b>Steering wheel: 18 in. 4-spoke.</b>	0	0
8201200	O	<b>Adjustable telescoping tilt steering column.</b>	361	10
8208498	O	<b>Five spare switches: Wired to power.</b>	159	0
8222712	O	<b>Gauge: Fuel filter restriction gauge.</b>	122	0
8282004	S	<b>KW Driver Information Center: Includes fuel</b> economy, RPM display, trip information, truck information, diagnostics, gear display, alarm clock.	0	0
8282009	S	<b>Instrument package: Includes speedometer,</b> tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010+ engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0	0
8282107	S	<b>Large flat panel on dash For customer-installed</b> controls. Reduces gauge count by 6.	0	0
8331140	S	<b>Cab Interior: Summit. T440/T470 Only. Includes</b> smooth upholstered side & back panels w/stitched accent lines, upholstered door pads, full vinyl headliner, black dash panels & black rubber floor mats.	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
8343304	S	<b>Interior color: Slate Gray w/trim Dark Slate Gray</b>	0	0
8410091	S	<b>Driver seat: Kenworth Air cushion Plus HB cloth.</b> Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6-23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted and includes a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	0	0
8450090	O	<b>Rider seat: Kenworth Plus battery box HB cloth.</b> Standard features include fixed base and backrest, fixed seat base and backrest, and dual armrests. Seat cushion is 19.5 inches. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted with a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	83	-35
8490110	S	<b>Seat color: Dark Slate Gray.</b>	0	0
8601421	O	<b>Kenworth Radio with AM/FM/WB/USB and Bluetooth</b>	403	4
8699926	O	<b>CB installation kit: Center mounted of header.</b> W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	240	0
8700108	O	<b>Under dash center console: Includes one cupholder</b> & two 12V outlets. For use w/Autoshift, Ultrashift, & Allison Gen IV only.	26	0
8700168	S	<b>Non-self cancelling turn signal: W/column-mounted</b> headlight dimmer switch & intermittent wiper control.	0	0
8700186	S	<b>Electric LH &amp; RH door locks.</b>	0	0
8800200	S	<b>Cab access contoured grabhandles, LH/RH.</b>	0	0
8800400	S	<b>Grabhandle LH inside door frame above dash.</b>	0	0
8800401	S	<b>Grabhandle RH inside door frame above dash.</b>	0	0
8832115	O	<b>DAYLITE DOOR: LH/RH INCL RH PEEPER WINDOW</b>	0	0
8841618	O	<b>Dual rectangular air horn 23 in. LH &amp; RH top of</b> roof. Includes air horn covers.	193	4
8850300	S	<b>Look-Down, Pass. Door, Stainless 8.5x4.4</b>	0	0
8863570	O	<b>Dual convex heated mirror 8.5 inch w/ offset</b> mounting below regular mirror.	75	11
8866101	O	<b>Mirror: Dual Prutsmann mirror 7 in. x 16 in.</b> polished stainless steel, thermostatically controlled. switch located on door pad.	44	0
8869005	S	<b>Mirror brackets 8-1/2 ft load width.</b>	0	0
8871438	S	<b>Rear Cab Stationary Window 17 in. x 36 in.</b>	0	0
8879213	O	<b>Electric-powered LH &amp; RH door window lifts.</b> Switch located on door.	311	0
8890100	S	<b>One-piece windshield, w/ curved glass.</b>	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:15:01 AM **Complete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q22545332  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
8890135	O	Exterior stainless steel sunvisor.	537	11
8890351	O	2 in. rubber wheelwell fender extension.	161	8

**Lights & Instruments**

9010801	S	Headlamps: Halogen Projector Low Beam, Halogen Complex Reflector High Beam	0	0
9022137	O	Marker Lights: Five, rectangular, LED	100	0
9030010	S	Turn Signal Lights: Mounted on fender	0	0
9052011	O	Dual Flush Floodlights: First set.	123	2
9059911	O	Floodlight Location: Located mid - first set.	0	0
9070138	S	Combination Stop, Tail, Turn & Backup Lights RH & LH.	0	0
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	145	4
9090302	O	Junction Box: Mounted Behind Cab or Sleeper Not Mounted at End of Frame.	132	1
9090845	O	Circuit Breakers: Replacing fuses. Does not apply to any 5-amp fuse box position. Breakers include stop/brake/turn, tail lamp, high & low beams, marker/clearance lamps, horn, fuel heat, gauges, air dryer, HVAC controls, panel lamps. Some circuits will remain fuses.	39	0

**Air Equipment**

9101215	S	Air Dryer Bendix AD-IS heated Puraguard	53	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0	0
9110020	O	Full truck kit: Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	595	15
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0	0

**Extended Warranty**

9200021	O	Standard Warranty.	0	0
---------	---	--------------------	---	---

**Miscellaneous**

9409852	O	GHG Secondary Manufacturer: Does Not Apply	0	0
---------	---	--	---	---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:15:01 AM	<b>Complete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q22545332
Prepared by:	Dan Crombie		Version Number:	38.21



Data	Code	Description	\$ List	Weight
Paint				
9700000	O	<b>Paint color number.</b> N97020 A - L2225 CANDY APPLE R N97200 FRAME N0001 BLACK	0	0
9943051	O	<b>Day Cab Premium Paint</b>	200	0
9944820	O	<b>1 - Color Paint - Day Cab</b> Color will be White if no other color is specified.	0	0
9965510	S	<b>Base coat/clear coat.</b> The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Total Adjusted Price (W/O Freight & Warranty & Surcharges)	\$156,382
Freight Charge	\$2,225
Options Not Subject to Discount	\$0
Surcharges Not subject to Discount	\$0
Total Weight	13615 lb

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:15:01 AM	<b>Complete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q22545332
Prepared by:	Dan Cromble		Version Number:	38.21

**Prepared For:**  
City of Columbus  
Jennifer Schultz  
105 N Dickason Blvd.  
Columbus, WI 53925-1565  
(920)623 - 5900  
Reference ID: N/A

**Presented By:**  
LAKESIDE INTERNATIONAL TRUCKS  
Eric Rosenquist  
7243 MANUFACTURERS DRIVE  
MADISON WI 53704 -  
(608)246-5860

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**Model Profile**  
**2018 7500 SBA 4X2 (SA637)**

<b>APPLICATION:</b>	Construction Dump
<b>MISSION:</b>	Requested GVWR: 52000. Calc. GVWR: 43000 Calc. Start / Grade Ability: 23.65% / 2.99% @ 55 MPH Calc. Geared Speed: 70.6 MPH
<b>DIMENSION:</b>	Wheelbase: 165.00, CA: 97.90, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{Cummins L9 370} EPA 2017, 370 HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 5.63
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 315/80R22.5 Load Range L CITY SERVICE HA3 (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(4) 11R22.5 Load Range H HDC1 (CONTINENTAL), 488 rev/mile, 75 MPH, Drive
<b>SUSPENSION, RR, SPRING, SINGLE:</b>	Vari-Rate; 23,500-lb Capacity
<b>PAINT:</b>	Cab schematic 209GN Location 1: 2303, Red (Std) Location 2: 9219, Winter White (Std) Chassis schematic N/A

*\$88,779.00*

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
Base Chassis, Model 7500 SBA 4X2 with 165.00 Wheelbase, 97.90 CA, and 75.00 Axle to Frame.	7199/3997	11196
FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	114/442	556
BUMPER, FRONT Omit Item	-92/16	-76
FRAME EXTENSION, FRONT Integral; 27" In Front of Grille	106/-16	90
WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)	0/0	0
AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	141/0	141
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 20,000-lb Capacity; With Shock Absorbers	73/0	73
<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control	15/0	15
BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4		
<u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered		
BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqn Long Stroke Brake Chambers	0/0	0
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
AIR BRAKE ABS {Meritor Wabco AntiLock Brake System} (4-Channel)	5/0	5
AIR DRYER {Bendix AD-9} With Heater	0/0	0
<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab		
BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake	0/0	0
BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 Sqn	0/0	0
SLACK ADJUSTERS, FRONT {Haldex} Automatic	6/0	6
SLACK ADJUSTERS, REAR {Haldex} Automatic	0/0	0

Description

BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake

<u>F/R Wt</u>	<u>Tot Wt</u>
(lbs)	(lbs)
0/0	0

Notes

: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

AIR COMPRESSOR {Cummins} 18.7 CFM Capacity	0/0	0
DUST SHIELDS, FRONT BRAKE for Air Brakes	4/0	4
DUST SHIELDS, REAR BRAKE for Air Brakes	0/6	6
DRAIN VALVE Automatic, with (3) Pull Chains, for Air Tanks	0/0	0
AIR TANK LOCATION (2) : One Mounted Under Each Frame Rail, Front of Rear Suspension, Parallel to Rail	0/0	0
STEERING COLUMN Tilting and Telescoping	0/0	0
STEERING WHEEL 2-Spoke, 18" Dia., Black	0/0	0
STEERING GEAR (2) {Sheppard M100/M80} Dual Power	124/-5	119
AFTERTREATMENT COVER Polished Aluminum	0/0	0
EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	0/0	0
ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger	0/0	0
TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust	0/0	0
MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0
EXHAUST HEIGHT 11' 6"	2/0	2
ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0

Includes

: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab  
 : FUSES, ELECTRICAL SAE Blade-Type  
 : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover  
 : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever  
 : HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels  
 : JUMP START STUD Located on Positive Terminal of Outermost Battery  
 : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light  
 : STARTER SWITCH Electric, Key Operated  
 : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector  
 : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature  
 : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever  
 : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted  
 : WIRING, CHASSIS Color Coded and Continuously Numbered

CIGAR LIGHTER Includes Ash Cup	1/0	1
SNOW SHIELD (2) Chrome; for Dual Air Horns	2/0	2
JUMP START STUD (2) Remote Mounted	0/0	0
ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, With Remote Sense	0/0	0

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
BATTERY SYSTEM {Deka/EAST PENN 9A31} Maintenance-Free (3) AGM 12-Volt 2775CCA Total	51/31	82
CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and Two Antenna Bases With Wiring	2/0	2
<u>Notes</u> : NOT INCLUDED: Antenna		
RADIO AM/FM/WB/Clock/3MM Auxiliary Input, with Multiple Speakers	1/0	1
BACK-UP ALARM Electric, 102 dBA	0/3	3
AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
HORN, ELECTRIC Disc Style	0/0	0
SWITCH, BODY CIRCUITS, MID for Bodybuilder, 6 Momentary Switches in Instrument Panel; One Power Module with 6 Channels, 20 Amp Max. Per Channel, 80 Amp Max Output, Switches Control Power Module Through Multiplex Wiring, Mounted in Cab Behind Driver Seat	1/0	1
WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
RUNNING LIGHT (2) Daytime	0/0	0
CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
HEADLIGHTS ON WWIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	0/0	0
HORN, AIR (2) Single Tone, Rectangular; Chrome. Roof Mounted	10/-1	9
INDICATOR, LOW COOLANT LEVEL With Audible Alarm	0/0	0
ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, With Ignition "OFF" and any Door Opened	0/0	0
CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	0/0	0
BATTERY BOX Steel, Mounted Inside the Cab, Under Passenger Seat, 3 Battery Capacity	0/0	0
TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
BATTERY DISCONNECT SWITCH 300 Amp; Cab Mounted, Disconnects Charging Circuits; Locks with Padlock	2/0	2
FENDER EXTENSIONS Rubber	6/0	6
GRILLE Stationary, Chrome	0/0	0
BUG SCREEN Mounted Behind Grille	5/0	5
FRONT END Tilting, Fiberglass, With Three Piece Construction; for WorkStar	0/0	0
PAINT SCHEMATIC, PT-1 Two Tone, Design 209.	0/0	0
PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
PROMOTIONAL PACKAGE Government and Municipal Silver Package; Two Year Limited Subscription of On-Command Service Information (Formerly Fleet ISIS), and On-Command Parts Information (Formerly Fleet Parts Catalog), Requires Specific Feature Combinations	0/0	0
CLUTCH Omit Item (Clutch & Control)	-86/-21	-107
ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	10/0	10
ENGINE, DIESEL {Cummins L9 370} EPA 2017, 370 HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)	0/0	0
FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed	9/0	9
<u>Includes</u> : FAN Nylon		
RADIATOR Cross Flow, Series System; 1228 SqIn Aluminum Radiator Core With Internal Water to Oil Transmission Cooler and 1167 In Charge Air Cooler	29/-3	26
<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		
AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control	2/0	2
<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted		
THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic, Stationary Pre-Set, Two Speed Settings; Mounted on Steering Wheel	0/0	0
ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use	0/0	0
ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control	0/0	0
FAN OVERRIDE Manual; With Electric Switch on Instrument Panel, (Fan On With Switch On)	0/0	0
HOSE CLAMPS, RADIATOR HOSES {R.G. Ray Mini Flex Seal} Coil Spring/"T"-Bolt Type, for Radiator Hoses over 1" I.D.	0/0	0
BLOCK HEATER, ENGINE {Phillips} 120V/1000W, With "Y" Cord From Socket in Standard Location, For a Dealer Installed 120V/300W Max Oil Pan Heater	0/0	0
EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations	0/0	0
FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2017	0/0	0
TRANSMISSION, AUTOMATIC {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.	-44/-12	-56
TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission	0/0	0
TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction	0/0	0
TRANSMISSION TCM LOCATION Located Inside Cab	0/0	0
SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming	0/0	0

Description	F/R Wt	Tot Wt
	(lbs)	(lbs)
PTO LOCATION Dual, Left and Right Side of Transmission	0/0	0
AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 5.63	0/16	16
<u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle		
<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance		
SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 23,500-lb Capacity	0/0	0
<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 30 thru 39.99 Pints	0/0	0
DEF TANK 9.5 U.S. Gal. 35.9L Capacity, Frame Mounted Outside Left Rail, Under Cab	16/5	21
FUEL/WATER SEPARATOR {Davco 243} 12 Volt Pre-Heater, with ESOC, Frame Mounted	0/0	0
LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail 34" Back of Cab	0/0	0
FUEL TANK Top Draw; Non-Polished Aluminum, 26" Diam., 80 U.S. Gal., 302 L Capacity Mounted Left Side, Under Cab	39/19	58
CAB Conventional	0/0	0
<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door		
HEATER SHUT-OFF VALVES (1) Ball Valve Type, Supply Line	5/0	5
GAUGE CLUSTER English With English Electronic Speedometer	0/0	0
<u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
GAUGE, OIL TEMP, AUTO TRANS , for Allison Transmission	1/0	1
GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel	2/0	2
IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
GAUGE, DEF FLUID LEVEL	0/0	0

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Mordura Cloth, Isolated, With 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Single Chamber Air Lumbar Support	13/-16	-3
MIRROR, CONVEX, LOOK DOWN {Lang Mekra} Right Side; 6" x 10 1/4", With Bright Finish	2/0	2
MIRRORS (2) {Lang Mekra} Styled; Rectangular, Power Both Sides, Thermostatically Controlled Heated Heads, Clearance Lights LED, Bright Finish Heads & Brackets, Breakaway Type, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing	8/0	8
GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar	3/0	3
MIRROR, CONVEX, HOOD MOUNTED (2) {Lang Mekra} Bright, Heated, Left and Right Sides 7.44" Sq	19/0	19
SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Mordura Cloth, for use with Batteries in Cab	0/0	0
WINDSHIELD Heated, Single Piece	1/0	1
ARM REST, RIGHT, DRIVER SEAT	3/0	3
AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster	47/7	54
<u>Includes</u>		
: HEATER HOSES Premium		
: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps		
: REFRIGERANT Hydrofluorocarbon HFC-134A		
INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5
HVAC FRESH AIR FILTER	0/0	0
FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	0/0	0
CAB INTERIOR TRIM Premium	-6/-4	-10
<u>Includes</u>		
: "A" PILLAR COVER Molded Plastic		
: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering		
: CAB SOUND INSULATION Includes Dash and Engine Cover Insulators		
: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side		
: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights		
: COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side		
: DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors		
: FLOOR COVERING Rubber, Black		
: GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster		
: HEADLINER Soft Padded Cloth		
: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section		
: STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors		
: SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side		
CAB REAR SUSPENSION Air Bag Type	0/0	0
SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color; Includes Integral Clearance/Marker Lights	14/3	17

**Description**

	<b><u>F/R Wt</u></b>	<b><u>Tot Wt</u></b>
	(lbs)	(lbs)
WHEELS, FRONT {Accuride 41730} DISC; 22.5x9.00 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
WHEELS, REAR DUAL DISC; 22.5x8.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/-106	-106

**Notes**

: Aluminum Wheels not Painted or Coated  
 : COMPATIBLE TIRE SIZES: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5  
 : Polished Surface Outside Dual Only

WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil	0/0	0
(4) TIRE, REAR 11R22.5 Load Range H HDC1 (CONTINENTAL), 488 rev/mile, 75 MPH, Drive	0/36	36
(2) TIRE, FRONT 315/80R22.5 Load Range L CITY SERVICE HA3 (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	82/0	82

**Services Section:**

WARRANTY Standard for Paystar 5000, and Workstar 7500/7600, Effective with Vehicles Built January 2, 2015 or Later, CTS-2003Z	0/0	0
---	-----	---

**Total Component Weight:**

**7956/4397 12353**

Oil Pan Heater	0/0	0
Winter Front	0/0	0
Cab Blow Out Kit	0/0	0
Peep Window	0/0	0

**Total Goods Purchased:**

**0/0 0**

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

**INTERNATIONAL®**

**Financial Summary**  
**2018 7500 SBA 4X2 (SA637)**

**December 27, 2016**

Description

(US DOLLAR)

Price

Net Sales Price:

\$88,779.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

**Approved by Seller:**

**Accepted by Purchaser:**

\_\_\_\_\_  
Official Title and Date

\_\_\_\_\_  
Firm or Business Name

\_\_\_\_\_  
Authorized Signature

\_\_\_\_\_  
Authorized Signature and Date

This proposal is not binding upon the seller without  
Seller's Authorized Signature

\_\_\_\_\_  
Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

**Prepared for:**  
Jenny Schultz  
Columbus DPW  
105 N Dickason Boulevard  
Columbus, WI 53925  
Phone: 920-623-5900


**Prepared by:**  
Dylan Glindinning  
TRUCK COUNTRY OF  
WISCONSIN  
9202 N. 107TH STREET  
MILWAUKEE, WI 53224  
Phone: 4147613384

*A proposal for*  
**Columbus DPW**

*Prepared by*  
**TRUCK COUNTRY OF WISCONSIN**  
*Dylan Glindinning*

*Dec 19, 2016*

**Western Star 4700SB**

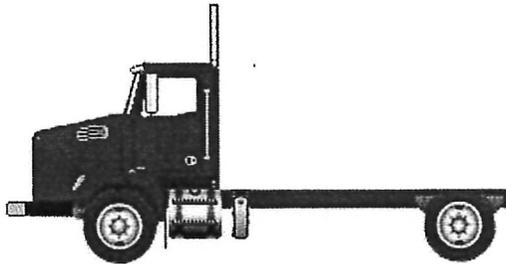

Components shown may not reflect all spec'd options and are not to scale

# 88,531.00

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

## S P E C I F I C A T I O N   P R O P O S A L

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Price Level</b>				
PRL-15T	WESTERN STAR 4700 PRL-15T (EFF:10/25/16)			STD
<b>Data Version</b>				
DRL-005	SPECPRO21 DATA RELEASE VER 005			N/C
<b>Vehicle Configuration</b>				
001-451	4700 SET-BACK FRONT AXLE CHASSIS	9,215	6,630	\$162,060.00
004-218	2018 MODEL YEAR SPECIFIED			N/C
002-004	SET BACK AXLE - TRUCK			STD
019-002	STRAIGHT TRUCK PROVISION			STD
003-001	LH PRIMARY STEERING LOCATION			STD
<b>General Service</b>				
AA1-002	TRUCK CONFIGURATION			STD
AA6-001	DOMICILED, USA 50 STATES (INCLUDING CALIFORNIA AND CARB OPT-IN STATES)			STD
A85-011	CONSTRUCTION SERVICE			STD
A84-1GM	GOVERNMENT BUSINESS SEGMENT			N/C
AA4-003	DRY BULK COMMODITY			STD
AA5-002	TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS			STD
AB1-008	MAXIMUM 8% EXPECTED GRADE			STD
AB5-001	SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE			STD
995-1A5	WESTERN STAR VOCATIONAL WARRANTY			STD
A66-99D	EXPECTED FRONT AXLE(S) LOAD : 20000.0 lbs			
A68-99D	EXPECTED REAR DRIVE AXLE(S) LOAD : 23000.0 lbs			
A63-99D	EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 43000.0 lbs			
<b>Truck Service</b>				
AA3-018	FRONT PLOW/END DUMP BODY			N/C

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Engine</b>				
101-22V	CUM L9 370 HP @ 2000 RPM, 2100 GOV RPM, 1250 LB/FT @ 1400 RPM	-850	-70	(\$4,724.00)
<b>Electronic Parameters</b>				
79A-075	75 MPH ROAD SPEED LIMIT			N/C
79B-000	CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT			N/C
79P-002	PTO RPM WITH CRUISE SET SWITCH - 700 RPM			N/C
79Q-003	PTO RPM WITH CRUISE RESUME SWITCH - 800 RPM			N/C
79S-001	PTO MODE CANCEL VEHICLE SPEED - 5 MPH			N/C
79U-007	PTO GOVERNOR RAMP RATE - 250 RPM PER SECOND			N/C
80G-002	PTO MINIMUM RPM - 700			N/C
80J-002	REGEN INHIBIT SPEED THRESHOLD - 5 MPH			N/C
<b>Engine Equipment</b>				
99C-017	2016 ONBOARD DIAGNOSTICS/2010 EPA/CARB/FINAL GHG17 CONFIGURATION			STD
99D-011	2008 CARB EMISSION CERTIFICATION - CLEAN IDLE (INCLUDES 6X4 INCH LABEL ON LOWER FORWARD CORNER OF DRIVER DOOR)			\$106.00
13E-001	STANDARD OIL PAN			STD
105-001	ENGINE MOUNTED OIL CHECK AND FILL			STD
133-004	ONE PIECE VALVE COVER			STD
014-108	SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER WITH SAFETY ELEMENT AND INSIDE/OUTSIDE AIR WITH SNOW DOOR	10		\$367.00
124-1D7	DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE			STD
292-148	(3) ALLIANCE ABSORBED GLASS MAT MODEL 7A31, GROUP 31, 12 VOLT MAINTENANCE FREE 2190 CCA THREADED STUD BATTERIES			STD
290-1AC	PASSENGER SEAT BATTERY BOX VENTED TO OUTSIDE OF CAB			STD
282-013	BATTERY BOX MOUNTED UNDER PASSENGER SEAT			STD
291-017	WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN			STD
289-006	PLASTIC BATTERY BOX COVER			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
295-029	POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER	2		\$86.00
107-032	CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE			N/C
131-013	AIR COMPRESSOR DISCHARGE LINE			STD
152-041	ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM			STD
128-076	CUMMINS EXHAUST BRAKE INTEGRAL WITH VARIABLE GEOMETRY TURBO WITH ON/OFF DASH SWITCH	20		N/C
016-1C2	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE			STD
28F-002	ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH			STD
239-038	11 FOOT 06 INCH (138 INCH+0/-5.9 INCH) EXHAUST SYSTEM HEIGHT			STD
237-1CR	RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP			STD
23U-001	6 GALLON DIESEL EXHAUST FLUID TANK			STD
30N-003	100 PERCENT DIESEL EXHAUST FLUID FILL			STD
23Y-001	STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING			STD
43X-002	LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION			STD
242-001	STAINLESS STEEL AFTERTREATMENT DEVICE/MUFFLER/TAILPIPE SHIELD			N/C
273-018	HORTON DRIVEMASTER ADVANTAGE ON/OFF FAN DRIVE			STD
276-001	AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED			N/C
110-003	CUMMINS SPIN ON FUEL FILTER			N/C
118-008	COMBINATION FULL FLOW/BYPASS OIL FILTER			N/C
266-017	1300 SQUARE INCH ALUMINUM RADIATOR	-20		STD
267-006	MOUNTING FOR FIREWALL MOUNTED SURGE TANK			\$22.00
103-036	ANTIFREEZE TO -34F, ETHYLENE GLYCOL PRE-CHARGED SCA HEAVY DUTY COOLANT			STD
171-007	GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT			

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
172-001	CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES			STD
270-016	RADIATOR DRAIN VALVE			N/C
168-998	NO RADIATOR/OIL PAN GUARD	-5		(\$94.00)
360-016	1310 ADAPTER FLANGE FOR FRONT PTO PROVISION	10		\$1,458.00
138-011	PHILLIPS-TEMRO 1000 WATT/115 VOLT BLOCK HEATER	4		N/C
166-002	PHILLIPS-TEMRO 150 WATT/115 VOLT OIL PREHEATER	4		N/C
140-022	CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR			STD
134-001	ALUMINUM FLYWHEEL HOUSING			STD
132-004	ELECTRIC GRID AIR INTAKE WARMER			N/C
155-058	DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH	-10		N/C
<b>Transmission</b>				
342-582	ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION	-110	-35	\$7,691.00
<b>Transmission Equipment</b>				
343-340	ALLISON VOCATIONAL PACKAGE 224 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODEL RDS			N/C
84B-002	ALLISON VOCATIONAL RATING FOR CONCRETE MIXER APPLICATIONS ONLY AVAILABLE WITH 3000 PRODUCT FAMILIES			N/C
84C-023	PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
84D-023	SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
84E-000	PRIMARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84F-000	SECONDARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84G-000	PRIMARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84H-000	SECONDARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
84L-000	LOAD BASED SHIFT SCHEDULE AND VEHICLE ACCELERATION CONTROL RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED VOCATIONAL USAGE			N/C
341-018	MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN			N/C
345-006	ELECTRONIC CONTROL SHIFT LEVER, TUNNEL/FLOOR MOUNTED			\$532.00
97G-004	TRANSMISSION PROGNOSTICS - ENABLED 2013			N/C
370-015	WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK			STD
346-003	TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK			N/C
35T-001	SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)			N/C
<b>Front Axle and Equipment</b>				
400-1BB	DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE			\$1,487.00
402-030	MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			STD
403-002	NON-ASBESTOS FRONT BRAKE LINING			STD
419-023	CONMET CAST IRON FRONT BRAKE DRUMS			STD
409-021	SKF SCOTSEAL PLUS XL FRONT OIL SEALS			STD
408-001	VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL			STD
416-022	STANDARD SPINDLE NUTS FOR ALL AXLES			STD
405-003	HALDEX AUTOMATIC FRONT SLACK ADJUSTERS			STD
406-001	STANDARD KING PIN BUSHINGS			STD
536-055	TRW THP-60 POWER STEERING WITH RCH45 AUXILIARY GEAR	90		N/C
539-003	POWER STEERING PUMP			STD
534-003	4 QUART POWER STEERING RESERVOIR			N/C
533-001	OIL/AIR POWER STEERING COOLER			N/C
40T-003	SYNTHETIC 50W FRONT AXLE LUBE			STD
<b>Front Suspension</b>				
620-043	9,500# LEFT, 10,500# RIGHT MIXER/PLOW FLAT LEAF FRONT SUSPENSION (20,000#)	60		\$217.00
619-004	GRAPHITE BRONZE BUSHINGS WITH SEALS - FRONT SUSPENSION			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
410-001	FRONT SHOCK ABSORBERS			\$215.00
<b>Rear Axle and Equipment</b>				
420-1G6	S23-190 23,000# R-SERIES SINGLE REAR AXLE		-2,240	(\$7,700.00)
421-538	5.38 REAR AXLE RATIO			N/C
424-001	IRON REAR AXLE CARRIER WITH STANDARD AXLE HOUSING			N/C
386-074	MXL 176T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES	-25	-25	(\$97.00)
452-001	DRIVER CONTROLLED TRACTION DIFFERENTIAL - SINGLE REAR AXLE		20	\$667.00
878-018	(1) DRIVER CONTROLLED DIFFERENTIAL LOCK REAR VALVE FOR SINGLE DRIVE AXLE			N/C
87B-008	INDICATOR LIGHT FOR EACH DRIVER CONTROLLED TRACTION DEVICE SWITCH			N/C
423-033	MERITOR 16.5X7 Q+ CAST SPIDER HEAVY DUTY CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			\$135.00
433-002	NON-ASBESTOS REAR BRAKE LINING			STD
434-011	BRAKE CAMS AND CHAMBERS ON FORWARD SIDE OF DRIVE AXLE(S)			\$23.00
451-023	CONMET CAST IRON REAR BRAKE DRUMS			STD
440-021	SKF SCOTSEAL PLUS XL REAR OIL SEALS			STD
426-074	HALDEX GOLDSEAL LONGSTROKE 1-DRIVE AXLE SPRING PARKING CHAMBERS		-20	N/C
428-031	HALDEX AUTOMATIC REAR SLACK ADJUSTERS WITH STAINLESS STEEL CLEVIS PINS			\$2.00
41T-002	SYNTHETIC 75W-90 REAR AXLE LUBE			STD
<b>Rear Suspension</b>				
622-1DF	30,000# FLAT LEAF SPRING REAR SUSPENSION WITH HELPER AND RADIUS ROD		150	(\$1,693.00)
621-001	SPRING SUSPENSION - NO AXLE SPACERS			N/C
431-001	STANDARD AXLE SEATS IN AXLE CLAMP GROUP			N/C
623-005	FORE/AFT CONTROL RODS			N/C
<b>Brake System</b>				
490-100	WABCO 4S/4M ABS WITHOUT TRACTION CONTROL			STD
871-001	REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES			STD
904-001	FIBER BRAID PARKING BRAKE HOSE			STD
412-001	STANDARD BRAKE SYSTEM VALVES			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
432-003	RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE			STD
480-083	WABCO SS-1200 PLUS AIR DRYER WITH INTEGRAL AIR GOVERNOR AND HEATER			STD
483-004	WABCO OIL COALESCING FILTER FOR AIR DRYER			\$25.00
479-015	AIR DRYER FRAME MOUNTED			STD
460-058	STEEL AIR TANKS MOUNTED AFT INSIDE AND/OR BELOW FRAME JUST FORWARD OF REAR SUSPENSION			N/C
477-004	PULL CABLES ON ALL AIR RESERVOIR(S)			\$23.00
485-037	CAB BLOW OUT KIT WITH AIR HOSE AND NOZZLE INSIDE LH CAB ENTRY DOOR	2		\$94.00
<b>Wheelbase &amp; Frame</b>				
545-430	4300MM (169 INCH) WHEELBASE			N/C
546-102	7/16X3-9/16X11-1/8 INCH STEEL FRAME (11.11MMX282.6MM/0.437X11.13 INCH) 120KSI	80	150	\$903.00
547-034	PARTIAL INNER FRAME REINFORCEMENT AT FRONT SUSPENSION	195	-5	\$979.00
548-803	BODY COMPANY INSTALLED ADDITIONAL FRONT FRAME REINFORCEMENT FOR SNOW PLOW			N/C
552-014	1900MM (75 INCH) REAR FRAME OVERHANG			N/C
55W-007	FRAME OVERHANG RANGE: 71 INCH TO 80 INCH	-20	100	N/C
549-002	24 INCH INTEGRAL FRONT FRAME EXTENSION	158	-20	\$941.00
AC8-99D	CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 105.69 in			
AE8-99D	CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 102.69 in			
AE4-99D	CALC'D FRAME LENGTH - OVERALL : 313.61			
AM6-99D	CALC'D SPACE AVAILABLE FOR DECKPLATE : 105.69 in			
FSS-0LH	CALCULATED FRAME SPACE LH SIDE : 85.36 in			N/C
FSS-0RH	CALCULATED FRAME SPACE RH SIDE : 123.72 in			N/C
553-001	SQUARE END OF FRAME			STD
559-001	STANDARD WEIGHT ENGINE CROSSMEMBER			STD
561-001	STANDARD CROSSMEMBER BACK OF TRANSMISSION			STD
562-001	STANDARD MIDSHIP #1 CROSSMEMBER(S)			STD
572-001	STANDARD REARMOST CROSSMEMBER			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
565-001	STANDARD SUSPENSION CROSSMEMBER			N/C
568-001	STANDARD WEIGHT REAR SUSPENSION CROSSMEMBER			STD
<b>Chassis Equipment</b>				
556-997	OMIT FRONT BUMPER, CUSTOMER INSTALLED SPECIAL BUMPER, DOES NOT COMPLY WITH FMCSR 393.203	-110		(\$786.00)
558-001	FRONT TOW HOOKS - FRAME MOUNTED	15		\$55.00
586-015	FRONT ANTI-SPRAY CAB MOUNTED MUDFLAPS			STD
551-007	GRADE 8 THREADED HEX HEADED FRAME FASTENERS			STD
<b>Fuel Tanks</b>				
204-151	60 GALLON/227 LITER ALUMINUM FUEL TANK - LH			STD
218-006	25 INCH DIAMETER FUEL TANK(S)			STD
215-007	PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH POLISHED STAINLESS STEEL BANDS			\$347.00
212-007	FUEL TANK(S) FORWARD			STD
664-001	PLAIN STEP FINISH			STD
205-001	FUEL TANK CAP(S)			STD
122-1H7	DAVCO 245 FUEL/WATER SEPARATOR WITH WATER IN FUEL SENSOR	20		N/C
216-020	EQUIFLO INBOARD FUEL SYSTEM			STD
202-016	HIGH TEMPERATURE REINFORCED NYLON FUEL LINE			STD
213-001	INSULATION FOR FUEL LINES	2		\$95.00
221-998	NO FUEL COOLER	-10		(\$121.00)
<b>Tires</b>				
093-0RW	MICHELIN XZA2 ENERGY 315/80R22.5 20 PLY RADIAL FRONT TIRES	56		\$226.00
094-2DY	CONTINENTAL HDC1 11R22.5 16 PLY RADIAL REAR TIRES		68	(\$444.00)
<b>Hubs</b>				
418-056	CONMET PRESET PLUS IRON FRONT HUBS			STD
450-056	CONMET PRESET PLUS IRON REAR HUBS			STD
<b>Wheels</b>				
502-355	ACCURIDE 41012 22.5X9.00 10-HUB PILOT 3.12 INSET 10-HAND ALUMINUM DISC FRONT WHEELS	-38		\$226.00

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
505-593	ACCURIDE 40008 22.5X8.25 10-HUB PILOT 10-HAND HD ALUMINUM DISC REAR WHEELS		-64	\$716.00
524-001	POLISHED FRONT WHEELS; OUTSIDE ONLY			\$42.00
525-001	POLISHED REAR WHEELS; OUTSIDE OF OUTER WHEELS ONLY			\$75.00
496-011	FRONT WHEEL MOUNTING NUTS			STD
497-011	REAR WHEEL MOUNTING NUTS			STD
<b>Cab Exterior</b>				
829-1A8	110 INCH BBC STEEL CONVENTIONAL CAB			STD
82A-008	WESTERN STAR STAINLESS STEEL CAB SKIRT			\$92.00
650-044	AIR CAB MOUNTS WITH CHECK VALVE			STD
705-007	STAINLESS STEEL SILL PLATES	5		\$52.00
648-002	NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE			STD
667-001	FRONT FENDERS			STD
754-001	2 INCH FENDER EXTENSIONS	5		\$89.00
678-034	LH AND RH EXTERIOR GRAB HANDLES WITH RUBBER INSERTS AND RH INTERIOR GRAB HANDLE MOUNTED TO A POST			STD
646-008	STATIONARY BRIGHT FINISH GRILLE			STD
65X-003	CHROME HOOD MOUNTED AIR INTAKE GRILLE			STD
640-008	GALVANEALD STEEL SEVERE SERVICE CAB			STD
644-004	FIBERGLASS HOOD			STD
690-002	TUNNEL/FIREWALL LINER			\$37.00
727-012	DUAL HADLEY SD-978 26 INCH RECTANGULAR AIR HORNS			STD
726-001	SINGLE ELECTRIC HORN			STD
728-002	DUAL HORN SHIELDS			STD
657-1AG	DOORS AND IGNITION KEYED THE SAME			STD
575-001	REAR LICENSE PLATE MOUNT END OF FRAME			STD
327-012	SWITCH, INDICATOR LIGHT AND WIRING FOR (2) CUSTOMER FURNISHED BEACONS			\$22.00
312-072	SINGLE RECTANGULAR SEALED BEAM HEADLIGHTS WITH BRIGHT BEZELS			STD
302-022	LED MARKER LAMPS			\$95.00
314-824	WIRING AND SWITCH FOR CUSTOMER FURNISHED SNOW PLOW LAMPS WITH DUAL CONNECTIONS AT BUMPER			\$182.00
294-001	INTEGRAL STOP/TAIL/BACKUP LIGHTS			STD
300-015	STANDARD FRONT TURN SIGNAL LAMPS			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
744-089	DUAL GROTE STAINLESS STEEL HEATED GRID TYPE MIRRORS WITH REINFORCED UPPER BRACKET			\$64.00
797-001	DOOR MOUNTED MIRRORS			STD
796-001	102 INCH EQUIPMENT WIDTH			STD
743-1AA	LH AND RH SUREPLUS 574 8 INCH BRIGHT FINISH HEATED CONVEX MIRRORS WITH SEPARATE ADJUSTMENT, MOUNTED BELOW MIRROR			\$36.00
74A-001	RH DOWN VIEW MIRROR			STD
74B-1B4	RH AND LH 8 INCH HEATED STAINLESS STEEL FENDER MOUNTED CONVEX MIRRORS WITH TRIPOD BRACKETS	12		\$351.00
729-001	STANDARD SIDE/REAR REFLECTORS			STD
764-001	FIBERGLASS EXTERIOR SUN VISOR	24		\$241.00
768-046	17.5X35 INCH TINTED REAR WINDOW			STD
661-006	TINTED DOOR GLASS			STD
654-011	RH AND LH ELECTRIC POWERED WINDOWS	4		\$151.00
769-002	LOWER RH DOOR WINDOW WITH FRESNEL LENS	7		\$89.00
663-023	2-PIECE TINTED CURVED GASKET MOUNTED HEATED WINDSHIELD			\$473.00
659-025	2 GALLON WINDSHIELD WASHER RESERVOIR WITHOUT FLUID LEVEL INDICATOR, MOUNTED UNDER CAB, WITH REMOTE FILL			STD
<b>Cab Interior</b>				
707-1D4	SMOKY MOUNTAIN GRAY VINYL PREMIUM INTERIOR			\$163.00
70K-005	BLACK HARD TRIM			STD
706-049	BASE LEFT HAND DOOR TRIM			STD
708-049	BASE RIGHT HAND DOOR TRIM			STD
772-007	BLACK MATS WITH DOUBLE INSULATION			\$37.00
785-007	DASH MOUNTED ASH TRAY AND LIGHTER, DRIVER SIDE			STD
691-001	FORWARD ROOF MOUNTED CONSOLE			STD
694-009	PASSENGER SIDE WING DASH MOUNTED GLOVE BOX WITH LOCKING DOOR			STD
693-025	LH AND RH DOOR MAP POCKETS			STD
741-029	COAT HOOK ON RH BACKWALL OF CAB			STD
742-032	(1) DOUBLE CUP HOLDER WITH CELL PHONE HOLDER LH OR RH DASH			\$52.00

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
680-034	TWO-TONE CHARCOAL UPPER/COOL GRAY LOWER SOFT TOUCH WING DASH WITH BLACK DRIVER SIDE COSMETIC UNDER DASH COVER			STD
320-004	STANDARD WIRING			STD
700-023	HEATER, DEFROSTER AND AIR CONDITIONER WITH CONSTANT TEMPERATURE CONTROL AND COSMETIC COVER			STD
701-010	HVAC DUCTING WITH FOAM MAIN FRESH AIR FILTER AND OUTSIDE PRE-FILTER			STD
703-005	MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH			STD
170-015	STANDARD HEATER PLUMBING			STD
130-033	DENSO HEAVY DUTY AIR CONDITIONER COMPRESSOR			STD
698-001	RADIATOR MOUNTED AIR CONDITIONER CONDENSER			STD
702-002	BINARY CONTROL, R-134A			STD
739-001	CAB INSULATION			STD
285-019	AUTOMATIC SELF-RESET CIRCUIT BREAKER IN MAIN DASH POWER DISTRIBUTION BOX AND CIRCUIT BREAKER/FUSE IN AUXILIARY POWER DISTRIBUTION BOXES			\$21.00
324-075	DOOR ACTIVATED DOME LIGHT, UNDER DASH LIGHT AND LH AND RH DOOR MOUNTED COURTESY LIGHTS			STD
655-001	CAB DOOR LATCHES WITH MANUAL DOOR LOCKS			STD
284-023	(1) 12 VOLT POWER SUPPLY IN DASH			\$90.00
756-1DD	BASIC HIGH BACK AIR SUSPENSION DRIVER SEAT WITH 1 CHAMBER AIR LUMBAR, INTEGRATED CUSHION EXTENSION AND REAR CUSHION TILT			STD
760-294	BATTERY BOX MID BACK NON SUSPENSION PASSENGER SEAT			STD
759-007	DUAL DRIVER SEAT ARMRESTS, NO PASSENGER SEAT ARMRESTS	4		\$71.00
758-022	BLACK MORDURA CLOTH DRIVER SEAT COVER			STD
761-023	BLACK MORDURA CLOTH PASSENGER SEAT COVER			STD
763-003	3 POINT DRIVER AND PASSENGER SEAT BELT RETRACTORS			STD
532-002	ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN			STD
540-005	2-SPOKE 20 INCH (500MM) BLACK STEERING WHEEL			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
765-002	DRIVER AND PASSENGER INTERIOR SUN VISORS			STD
<b>Instruments &amp; Controls</b>				
185-002	NON-ADJUSTABLE SUSPENDED PEDALS			STD
870-004	STAR GAUGES WITH BLACK BEZELS			STD
732-001	BLACK DRIVER INSTRUMENT PANEL			STD
734-001	BLACK CENTER INSTRUMENT PANEL			STD
486-001	LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM			STD
838-001	(1) SINGLE BRAKE APPLICATION AIR GAUGE			\$80.00
840-002	2 INCH PRIMARY AND SECONDARY AIR PRESSURE GAUGES			STD
198-002	INTAKE MOUNTED AIR RESTRICTION INDICATOR WITH GRADUATIONS			STD
721-001	97 DB BACKUP ALARM		3	\$82.00
149-012	CRUISE CONTROL SWITCHES IN THE CENTER PANEL			STD
156-007	KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY			STD
811-001	WARNING LAMP/LIGHT BAR DISPLAY, NON-DATA LINKED			STD
160-038	HEAVY DUTY ONBOARD DIAGNOSTICS INTERFACE CONNECTOR LOCATED BELOW LH DASH			STD
844-001	2 INCH ELECTRIC FUEL GAUGE			STD
148-003	PROGRAMMABLE RPM CONTROL - ELECTRONIC ENGINE			N/C
856-001	ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE			STD
864-001	2 INCH TRANSMISSION OIL TEMPERATURE GAUGE			STD
852-002	ELECTRIC ENGINE OIL PRESSURE GAUGE			STD
746-1A9	AM/FM RADIO WITH FRONT AND REAR AUXILIARY INPUTS AND J1939	10		\$236.00
747-002	ROOF/OVERHEAD CONSOLE MOUNTED RADIO			N/C
750-004	(4) RADIO SPEAKERS IN CAB			N/C
753-019	AM/FM ANTENNA MOUNTED ON RH FRONT A-PILLAR	2		\$30.00
748-026	POWER AND GROUND WIRING FOR CB RADIO IN OVERHEAD CONSOLE			STD
752-017	MULTI-BAND AM/FM/WB/CB LH MIRROR MOUNTED ANTENNA SYSTEM			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
810-042	ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITH ODOMETER			STD
817-001	STANDARD VEHICLE SPEED SENSOR			STD
812-001	ELECTRONIC 3000 RPM TACHOMETER			STD
813-998	NO VEHICLE PERFORMANCE MONITOR			(\$998.00)
162-002	IGNITION SWITCH CONTROLLED ENGINE STOP			STD
329-072	SIX IGNITION CONTROLLED EXTRA SWITCHES WITH INDICATOR LIGHT, 20 AMPS, WIRED BEHIND PASSENGER SEAT			\$244.00
836-001	2 INCH VOLTMETER			STD
660-008	SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY			STD
304-019	CAB MARKER LIGHT AND HEADLIGHT SWITCH WITH SEPARATE SWITCH AND TERMINALS FOR CUSTOMER FURNISHED SNOW PLOW LIGHTS			\$20.00
882-009	ONE VALVE PARKING BRAKE SYSTEM WITH WARNING INDICATOR			STD
299-037	SELF CANCELING TURN SIGNAL SWITCH WITH INTEGRAL HEADLAMP DIMMER WITH BRAKE OVERRIDE			\$100.00
298-036	PACIFIC INSIGHT ELECTRONIC FLASHER			STD
<b>Design</b>				
065-000	PAINT: ONE SOLID COLOR			STD
<b>Color</b>				
980-6TN	CAB COLOR A: L6049EB RED ELITE BC			N/C
96J-001	CAB INTERIOR PAINTED SAME AS CAB COLOR			STD
986-020	BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT			STD
976-995	SUNVISOR PAINTED SAME AS CAB COLOR A			N/C
<b>Certification / Compliance</b>				
996-001	U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS			STD
<b>Secondary Factory Options</b>				
82D-998	NO PDI INSTALLED GRILLE/HOOD TRIM			STD
<b>Sales Programs</b>				
NO SALES PROGRAMS HAVE BEEN SELECTED				

**TOTAL VEHICLE SUMMARY**

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

**Adjusted List Price**

Adjusted List Price \*\* \$166,358.00

**Weight Summary**

	Weight Front	Weight Rear	Total Weight
Factory Weight <sup>+</sup>	8818 lbs	4642 lbs	13460 lbs
<b>Total Weight<sup>+</sup></b>	<b>8818 lbs</b>	<b>4642 lbs</b>	<b>13460 lbs</b>

**ITEMS NOT INCLUDED IN ADJUSTED LIST PRICE**

**Other Factory Charges**

PMU-017	2016 OBD/2010 EPA/CARB/GHG17 ESCALATOR	\$300.00
RAM-18A	MODEL YEAR 2018 WST 4700 ESCALATOR - \$800	\$800.00
P73-2WS	STANDARD DESTINATION CHARGE	\$2,025.00

**Extended Warranty**

WAG-011	TOWING: 2 YEARS/UNLIMITED MILES/KM EXTENDED TOWING COVERAGE \$550 CAP FEX APPLIES	\$400.00
	Currency Exchange Rate	1.0000
	Total Extended Warranty (Local Currency)	\$400.00

(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.

(\*\*) Prices shown do not include taxes, fees, etc... "Net Equipment Selling Price" is located on the Quotation Details Proposal Report.

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

## Q U O T A T I O N

### 4700 SET-BACK FRONT AXLE CHASSIS

SET BACK AXLE - TRUCK  
 CUM L9 370 HP @ 2000 RPM, 2100 GOV RPM, 1250  
 LB/FT @ 1400 RPM  
 ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH  
 PTO PROVISION  
 S23-190 23,000# R-SERIES SINGLE REAR AXLE  
 30,000# FLAT LEAF SPRING REAR SUSPENSION WITH  
 HELPER AND RADIUS ROD  
 DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP  
 SINGLE FRONT AXLE

9,500# LEFT, 10,500# RIGHT MIXER/PLOW FLAT LEAF  
 FRONT SUSPENSION (20,000#)  
 110 INCH BBC STEEL CONVENTIONAL CAB  
 4300MM (169 INCH) WHEELBASE  
 7/16X3-9/16X11-1/8 INCH STEEL FRAME  
 (11.11MMX282.6MM/0.437X11.13 INCH) 120KSI  
 1900MM (75 INCH) REAR FRAME OVERHANG  
 PARTIAL INNER FRAME REINFORCEMENT AT FRONT  
 SUSPENSION  
 BODY COMPANY INSTALLED ADDITIONAL FRONT  
 FRAME REINFORCEMENT FOR SNOW PLOW

		PER UNIT		TOTAL
VEHICLE PRICE	TOTAL # OF UNITS (1)	\$	88,131	\$ 88,131
EXTENDED WARRANTY		\$	400	\$ 400
DEALER INSTALLED OPTIONS		\$	0	\$ 0
<b>CUSTOMER PRICE BEFORE TAX</b>		<b>\$</b>	<b>88,531</b>	<b>\$ 88,531</b>

#### TAXES AND FEES

TAXES AND FEES		\$	0	\$ 0
OTHER CHARGES		\$	0	\$ 0

#### TRADE-IN

TRADE-IN ALLOWANCE		\$	(0)	\$ (0)
--------------------	--	----	-----	--------

<b>BALANCE DUE</b>	<b>(LOCAL CURRENCY)</b>	<b>\$</b>	<b>88,531.00</b>	<b>\$ 88,531.00</b>
--------------------	-------------------------	-----------	------------------	---------------------

#### COMMENTS:

Projected delivery on \_\_\_ / \_\_\_ / \_\_\_ provided the order is received before \_\_\_ / \_\_\_ / \_\_\_.

#### APPROVAL:

Please indicate your acceptance of this quotation by signing below:

Customer: X \_\_\_\_\_ Date: \_\_\_ / \_\_\_ / \_\_\_.

**Daimler Truck Financial**

Financing that works for you.

See your local dealer for a competitive quote from Daimler Truck Financial, or contact us at [Information@dtfoffers.com](mailto:Information@dtfoffers.com).

Daimler Truck Financial offers a variety of finance, lease and insurance solutions to fit your business needs. For more information about our products and services, visit our website at [www.daimler-truckfinancial.com](http://www.daimler-truckfinancial.com).

**Prepared for:**  
Jenny Schultz  
Columbus DPW  
105 N Dickason Boulevard  
Columbus, WI 53925  
Phone: 920-623-5900

**Prepared by:**  
Dylan Glindinning  
TRUCK COUNTRY OF  
WISCONSIN  
9202 N. 107TH STREET  
MILWAUKEE, WI 53224  
Phone: 4147613384

**CITY OF COLUMBUS**

**FOR MEETING OF:** January 3, 2017

**REQUEST FROM/DEPARTMENT:** Public Works

**AGENDA ITEM/REQUEST:** Purchase of Tandem Axle Truck Chassis

\*\*\*\*\*

**DESCRIPTION AND SCOPE OF PROJECT/ITEM WITH KEY ISSUES NOTED:**

The 2017 approved city budget provided funds through the proposed borrowing for the replacement of two of the Public Works Department's larger trucks. The following quotes are for a 2018 tandem axle cab and chassis to replace truck #8 in our fleet. These quotes **do not** include: dump box, plow and wing, salter, or hydraulics. Those items will be quoted separately after the truck manufacturer has been determined. The estimated costs to add the dump box, plow/wing, salter or hydraulics is approximately \$120,000.00 per truck.

All of the truck specs contain Cummins engines and Allison transmissions. We would also recommend purchasing the 60 month/100,000 mile extended Cummins ISL Engine Coverage Protection Plan and After Treatment Coverage for an additional \$5,300.00.

**Western Star 4700SB (includes 2yr towing).....\$96,498.00**

**International 7500.....\$97,161.76**

**Kenworth T470.....\$103,800.00**

**PREVIOUS ACTION TAKEN (IF APPLICABLE):**

**BUDGET AND FINANCING INFORMATION:**

Account #: \_\_\_\_\_ Department: Public Works

Acct. # Approved Budget: \_\_\_\_\_ Current Balance in Acct #: \_\_\_\_\_

Remaining Balance in Acct #: \_\_\_\_\_ (after approval)

Tandem

**INTERNATIONAL®**

December 27, 2016

**Prepared For:**

City of Columbus  
Jennifer Schultz  
105 N Dickason Blvd.  
Columbus, WI 53925-1565  
(920)623 - 5900  
Reference ID: N/A

**Presented By:**

LAKESIDE INTERNATIONAL TRUCKS  
Eric Rosenquist  
7243 MANUFACTURERS DRIVE  
MADISON WI 53704 -  
(608)246-5860

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**Model Profile**  
**2018 7500 SBA 6X4 (SF637)**

<b>APPLICATION:</b>	Construction Dump
<b>MISSION:</b>	Requested GVWR: 52000. Calc. GVWR: 60000 Calc. Start / Grade Ability: 22.05% / 2.88% @ 55 MPH Calc. Geared Speed: 75.1 MPH
<b>DIMENSION:</b>	Wheelbase: 179.00, CA: 111.90, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{Cummins L9 370} EPA 2017, 370 HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, TANDEM:</b>	{Meritor MT-40-14X-4DCR} Single Reduction, 0.433"(11mm) Wall Housing Thickness, 40,000-lb Capacity, R Wheel Ends, With Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle Gear Ratio: 5.29
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 315/80R22.5 Load Range L CITY SERVICE HA3 (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(8) 11R22.5 Load Range H HDC1 (CONTINENTAL), 488 rev/mile, 75 MPH, Drive
<b>SUSPENSION, REAR, TANDEM:</b>	{Hendrickson HMX-400-52} Walking Beam Type 52" Axle Spacing; 40,000-lb Capacity, With Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers
<b>PAINT:</b>	Cab schematic 209GN Location 1: 2303, Red (Std) Location 2: 9219, Winter White (Std) Chassis schematic N/A

\$97,162.00

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
Base Chassis, Model 7500 SBA 6X4 with 179.00 Wheelbase, 111.90 CA, and 75.00 Axle to Frame.	7616/6299	13915
FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	162/365	527
BUMPER, FRONT Omit Item	-92/16	-76
FRAME EXTENSION, FRONT Integral; 27" In Front of Grille	106/-16	90
WHEELBASE RANGE 169" (430cm) Through and Including 219" (555cm)	0/0	0
AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	130/0	130
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 20,000-lb Capacity; With Shock Absorbers	73/0	73
<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control	15/0	15
BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4		
<u>Notes</u> : Rear Axle is Limited to 46,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle /Suspension Ordered.		
BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Brake Chambers	-62/0	-62
<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	0/0	0
AIR DRYER {Bendix AD-9} With Heater	0/0	0
<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab		
BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake	0/0	0
BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	0/0	0
SLACK ADJUSTERS, FRONT {Haldex} Automatic	6/0	6
SLACK ADJUSTERS, REAR {Haldex} Automatic	0/0	0

**Description**

**F/R Wt Tot Wt**  
(lbs) (lbs)

BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake

0/0 0

Notes

: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

AIR COMPRESSOR {Cummins} 18.7 CFM Capacity

0/0 0

DUST SHIELDS, FRONT BRAKE for Air Brakes

4/0 4

DUST SHIELDS, REAR BRAKE for Air Brakes

0/12 12

BRAKE CHAMBERS, SPRING on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)

0/0 0

DRAIN VALVE Automatic, with (3) Pull Chains, for Air Tanks

0/0 0

AIR TANK LOCATION (2) : One Mounted Under Each Frame Rail, Front of Rear Suspension, Parallel to Rail

0/0 0

STEERING COLUMN Tilting and Telescoping

10/0 10

STEERING WHEEL 2-Spoke, 18" Dia., Black

0/0 0

STEERING GEAR (2) {Sheppard M100/M80} Dual Power

124/-5 119

AFTERTREATMENT COVER Polished Aluminum

0/0 0

EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

0/0 0

ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger

0/0 0

TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust

0/0 0

MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel

0/0 0

EXHAUST HEIGHT 11' 6"

2/0 2

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

0/0 0

Includes

: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab

: FUSES, ELECTRICAL SAE Blade-Type

: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels

: JUMP START STUD Located on Positive Terminal of Outermost Battery

: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: STARTER SWITCH Electric, Key Operated

: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector

: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change

Feature

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever

: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted

: WIRING, CHASSIS Color Coded and Continuously Numbered

CIGAR LIGHTER Includes Ash Cup

1/0 1

SNOW SHIELD (2) Chrome; for Dual Air Horns

2/0 2

JUMP START STUD (2) Remote Mounted

0/0 0

<u>Description</u>	<u>F/R Wt</u>	<u>Tot Wt</u>
	(lbs)	(lbs)
ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, With Remote Sense	0/0	0
BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
BATTERY SYSTEM {Deka/EAST PENN 9A31} Maintenance-Free (3) AGM 12-Volt 2775CCA Total	54/28	82
CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and Two Antenna Bases With Wiring	2/0	2
<u>Notes</u>		
: NOT INCLUDED: Antenna		
RADIO AM/FM/WB/Clock/3MM Auxiliary Input, with Multiple Speakers	1/0	1
BACK-UP ALARM Electric, 102 dBA	0/3	3
AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
HORN, ELECTRIC Disc Style	0/0	0
SWITCH, BODY CIRCUITS, MID for Bodybuilder, 6 Momentary Switches in Instrument Panel; One Power Module with 6 Channels, 20 Amp Max. Per Channel, 80 Amp Max Output, Switches Control Power Module Through Multiplex Wiring, Mounted in Cab Behind Driver Seat	1/0	1
WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
RUNNING LIGHT (2) Daytime	0/0	0
CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	0/0	0
HORN, AIR (2) Single Tone, Rectangular; Chrome. Roof Mounted	9/-1	8
INDICATOR, LOW COOLANT LEVEL With Audible Alarm	0/0	0
ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, With Ignition "OFF" and any Door Opened	0/0	0
CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	0/0	0
BATTERY BOX Steel, Mounted Inside the Cab, Under Passenger Seat, 3 Battery Capacity	0/0	0
TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
BATTERY DISCONNECT SWITCH 300 Amp; Cab Mounted, Disconnects Charging Circuits; Locks with Padlock	2/0	2
FENDER EXTENSIONS Rubber	6/0	6
GRILLE Stationary, Chrome	0/0	0
BUG SCREEN Mounted Behind Grille	5/0	5
FRONT END Tilting, Fiberglass, With Three Piece Construction; for WorkStar	0/0	0
PAINT SCHEMATIC, PT-1 Two Tone, Design 209.	0/0	0

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
PROMOTIONAL PACKAGE Government and Municipal Silver Package; Two Year Limited Subscription of On-Command Service Information (Formerly Fleet ISIS), and On-Command Parts Information (Formerly Fleet Parts Catalog), Requires Specific Feature Combinations	0/0	0
CLUTCH Omit Item (Clutch & Control)	-91/-16	-107
ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	10/0	10
ENGINE, DIESEL {Cummins L9 370} EPA 2017, 370 HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)	0/0	0
FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed	-37/3	-34
<u>Includes</u> : FAN Nylon		
RADIATOR Cross Flow, Series System; 1228 SqIn Aluminum Radiator Core With Internal Water to Oil Transmission Cooler and 1167 In Charge Air Cooler	29/-3	26
<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		
AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control	2/0	2
<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted		
THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic, Stationary Pre-Set, Two Speed Settings; Mounted on Steering Wheel	0/0	0
ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use	0/0	0
ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control	0/0	0
FAN OVERRIDE Manual; With Electric Switch on Instrument Panel, (Fan On With Switch On)	0/0	0
HOSE CLAMPS, RADIATOR HOSES {R.G. Ray Mini Flex Seal} Coil Spring/"T"-Bolt Type, for Radiator Hoses over 1" I.D.	0/0	0
BLOCK HEATER, ENGINE {Phillips} 120V/1000W, With "Y" Cord From Socket in Standard Location, For a Dealer Installed 120V/300W Max Oil Pan Heater	0/0	0
EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations	0/0	0
FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2017	0/0	0
TRANSMISSION, AUTOMATIC {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.	-6/-50	-56
TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission	0/0	0
TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction	0/0	0
TRANSMISSION TCM LOCATION Located Inside Cab	0/0	0

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming	0/0	0
PTO LOCATION Dual, Left and Right Side of Transmission	0/0	0
AXLE, REAR, TANDEM {Meritor MT-40-14X-4DCR} Single Reduction, 0.433"(11mm) Wall Housing Thickness, 40,000-lb Capacity, R Wheel Ends, With Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle . Gear Ratio: 5.29	0/141	141
<u>Includes</u>		
: POWER DIVIDER LOCK Electric over Air Operated, Cab Control with Indicator Light		
: REAR AXLE DRAIN PLUG (2) Magnetic, For Tandem Rear Axle		
<u>Notes</u>		
: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
SUSPENSION, REAR, TANDEM {Hendrickson HMX-400-52} Walking Beam Type 52" Axle Spacing; 40,000-lb Capacity, With Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers	0/0	0
<u>Includes</u>		
: CROSSMEMBER, SUSPENSION Stamped Steel Double Dogbone		
<u>Notes</u>		
: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
SHOCK ABSORBERS, REAR (4) for Hendrickson HMX Suspension Only, Mounted from Frame to Beam	0/31	31
AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 50 thru 64.99 Pints	0/0	0
DEF TANK 9.5 U.S. Gal. 35.9L Capacity, Frame Mounted Outside Left Rail, Under Cab	17/4	21
FUEL/WATER SEPARATOR {Davco 243} 12 Volt Pre-Heater, with ESOC, Frame Mounted	0/0	0
LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail 34" Back of Cab	0/0	0
FUEL TANK Top Draw; Polished Aluminum, 26" Diam., 80 U.S. Gal., 302 L Capacity Mounted Left Side, Under Cab	38/17	55
CAB Conventional	0/0	0
<u>Includes</u>		
: ARM REST (2) Molded Plastic; One Each Door		
: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window		
: CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel		
: DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted		
: GLASS, ALL WINDOWS Tinted		
: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side		
: GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side		
: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color		
: STEP (4) Two Steps Per Door		
HEATER SHUT-OFF VALVES (1) Ball Valve Type, Supply Line	5/0	5
GAUGE CLUSTER English With English Electronic Speedometer	0/0	0
<u>Includes</u>		
: GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level		
: ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout		

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
: WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
GAUGE, OIL TEMP, AUTO TRANS , for Allison Transmission	1/0	1
GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel	2/0	2
IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
GAUGE, DEF FLUID LEVEL	0/0	0
SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Mordura Cloth, Isolated, With 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Single Chamber Air Lumbar Support	12/-15	-3
MIRROR, CONVEX, LOOK DOWN {Lang Mekra} Right Side; 6" x 10 1/4", With Bright Finish	2/0	2
MIRRORS (2) {Lang Mekra} Styled; Rectangular, Power Both Sides, Thermostatically Controlled Heated Heads, Clearance Lights LED, Bright Finish Heads & Brackets, Breakaway Type, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing	8/0	8
GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar	3/0	3
MIRROR, CONVEX, HOOD MOUNTED (2) {Lang Mekra} Bright, Heated, Left and Right Sides 7.44" Sq	19/0	19
SEAT, PASSENGER {Seats, Inc.} Non Suspension, High Back, Fixed Back, Integral Headrest, Mordura Cloth, for use with Batteries in Cab	0/0	0
WINDSHIELD Heated, Single Piece	1/0	1
ARM REST, RIGHT, DRIVER SEAT	3/0	3
AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster	48/6	54
<u>Includes</u>		
: HEATER HOSES Premium		
: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps		
: REFRIGERANT Hydrofluorocarbon HFC-134A		
INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5
HVAC FRESH AIR FILTER	0/0	0
FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood	1/0	1
CAB INTERIOR TRIM Premium	0/0	0
<u>Includes</u>		
: "A" PILLAR COVER Molded Plastic		
: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering		
: CAB SOUND INSULATION Includes Dash and Engine Cover Insulators		
: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side		
: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights		
: COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side		
: DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors		
: FLOOR COVERING Rubber, Black		
: GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster		

<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
: HEADLINER Soft Padded Cloth		
: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section		
: STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors		
: SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side		
CAB REAR SUSPENSION Air Bag Type	0/0	0
SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color; Includes Integral Clearance/Marker Lights	14/3	17
WHEELS, FRONT {Accuride 41730} DISC; 22.5x9.00 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
WHEELS, REAR DUAL DISC; 22.5x8.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/-213	-213
<u>Notes</u>		
: Aluminum Wheels not Painted or Coated		
: COMPATIBLE TIRE SIZES: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5		
: Polished Surface Outside Dual Only		
WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil	0/0	0
(8) TIRE, REAR 11R22.5 Load Range H HDC1 (CONTINENTAL), 488 rev/mile, 75 MPH, Drive	0/72	72
(2) TIRE, FRONT 315/80R22.5 Load Range L CITY SERVICE HA3 (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	82/0	82
<b>Services Section:</b>		
WARRANTY Standard for Paystar 5000, and Workstar 7500/7600, Effective with Vehicles Built January 2, 2015 or Later, CTS-2003Z	0/0	0
<b>Total Component Weight:</b>	<b>8349/6681</b>	<b>15030</b>
Oil Pan Heater	0/0	0
Winter Front	0/0	0
Cab Blow Out Kit	0/0	0
Peep Window	0/0	0
<b>Total Goods Purchased:</b>	<b>0/0</b>	<b>0</b>

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Net Sales Price:		\$97,162.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

\_\_\_\_\_  
Official Title and Date

\_\_\_\_\_  
Firm or Business Name

\_\_\_\_\_  
Authorized Signature

\_\_\_\_\_  
Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

\_\_\_\_\_  
Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.



December 15, 2016

City of Columbus  
105 N Dickason Blvd  
Columbus , WI 53925

Dear City of Columbus,

Thank you for the opportunity to quote new chassis' to be equipped with snow plow equipment. I am confident that the Kenworth T470 would be an excellent addition to your fleet. Below you will find pricing for both a single axle and a tandem axle based on the specs included in this packet.

2018 Kenworth T470 Single Axle Sales Price: \$92,500

2018 Kenworth T470 Tandem Axle Sales Price: \$103,800

Thank you again for the opportunity. Please do not hesitate to contact me with any questions or concerns.

Sincerely,

WISCONSIN KENWORTH

Dennis Petzke



Wisconsin Kenworth M450  
6395 Lake Rd

City of Columbus

Windsor, Wisconsin United States 53598  
Phone: (608) 846-5451  
Fax: (608) 846-2558  
Email: daniel.crombie@csctruck.com

Phone:  
Fax:  
Contact Email:  
Prepared for:

### Vehicle Summary

Unit		Chassis	
Model:	T400 Series Conventional.	Fr Axle Load (lbs):	20000
Type:	FULL TRUCK	Rr Axle Load (lbs):	40000
Description:	City of Columbus	G.C.W. (lbs):	60001
<b>Application</b>		Road Conditions:	
Intended Serv.:	Snowplow. Vehicles which are configured for	Class A (Highway)	80
Commodity:	Gravel/crushed rock/sand	Class B (Hwy/Mtn)	15
<b>Body</b>		Class C (Off-Hwy)	05
Type:	End dump	Class D (Off-Road)	00
Length (ft):	12.0	Maximum Grade:	6
Height (ft):	13.5	Wheelbase (in):	181
Max Laden Weight (lbs):	4000	Overhang (in):	60
<b>Trailer</b>		Fr Axle to BOC (in):	67
No. of Trailer Axles:	0	Cab to Axle (in):	114
Type:		Cab to EOF (in):	174
Length (ft):	0.0	Overall Comb. Length (in):	314
Height (ft):	0.0	<b>Special Req.</b>	
Kingpin Inset (in):	0	U.S. Domestic Registry, 50-State	
Corner Radius (in):	0		
<b>Restrictions</b>			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

Note: All sales are F.O.B. designated plant of manufacture.

<b>PACCAR FINANCIAL</b>	Ask your dealer for a quote today, or visit our website @ <a href="http://www.paccarfinancial.com">www.paccarfinancial.com</a> .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Crombie		Version Number:	38.21



Wisconsin Kenworth M450  
6395 Lake Rd

City of Columbus

Windsor, Wisconsin United States 53598  
Phone: (608) 846-5451  
Fax: (608) 846-2558  
Email: daniel.crombie@csctruck.com

Phone:  
Fax:  
Contact Email:  
Prepared for:

Data	Code	Description	\$ List	Weight
<b>Model</b>				
0000410	O	T400 Series Conventional.	114,840	11,600
0070072	O	T470 6x4 Class 8	0	0
0080050	O	CARB Idle Emissions Reduction Feature for PX-7 and PX-9	100	0
0090064	O	T470 6x4 Class 8	0	0
0091042	O	Gravel/crushed rock/sand	0	0
0093025	O	Snowplow. Vehicles which are configured for mounting a snowplow to the front. May also have dump or other body. Typically includes some operation off of paved roads. Road usage: majority of Class A & B, do not code for Class D.	0	0
0095010	O	End dump	0	0
0098025	O	U.S. Domestic Registry, 50-State	0	0

**Engine & Equipment**

0129569	O	PACCAR PX-9 370 2017 370@2000 365@2100 1250@1400 Includes turbo exhaust brake, no code is used. Diagnostic Plug for data link, Oil Cooler, Aluminum Flywheel Housing. N09200 N205 120..Standard Maximum Speed Limit [LSL] N09220 N207 0....Expiration Distance N09240 P09 120...Hard Maximum Speed Limit N09260 P14 64...Maximum Accelerator Pedal Vehicle Speed N09280 P16 0....Accelerator Lower Droop N09300 P19 64...Maximum Cruise Speed N09320 C143 0....Cruise Control Lower Droop N09360 N203 252..Reserve Speed Function Reset Distance N09380 N202 0....Maximum Cycle Distance N09400 N206 10...Maximum Active Distance N09420 N201 0....Reserve Speed Limit Offset N09440 P11 NO...Engine Protection Shutdown N09460 P06 NO...Gear Down Protection N09480 P26 1400.Max PTO Speed N09500 P02 NO...Cruise Control Auto Resume N09520 P04 NO...Auto Engine Brake in Cruise N09540 N209 0....Expiration Distance N09560 P520 YES..Enable Idle Shutdown Park Brake Set N09580 P32 5....Timer Setting N09600 P233 YES..Enable Impending Shutdown Warning N09620 P234 60...Timer For Impending Shutdown Warning N09640 P516 35...Engine Load Threshold	8,183	0
---------	---	---	-------	---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:17:00 AM *Incomplete* Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q60145586  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
		N09680 P33 NO...Idle Shutdown Manual Override		
		N09720 P230 YES..Enable Hot Ambient Automatic Override		
		N09740 P46 40...Low Ambient Temperature Threshold		
		N09760 P56 60...Intermediate Ambient Temperature Threshold		
		N09780 P47 80...High Ambient Temperature Threshold		
1000154	O	<b>Prospector version 39.0</b> Replaces version 38.2	0	0
1000684	O	<b>Effective VSL Setting NA</b>	0	0
1000858	O	<b>Engine Idle Shutdown Timer Disabled</b>	0	0
1000859	O	<b>Enable EIST Ambient Temp Override</b>	0	0
1000860	O	<b>Enable EIST in PTO Mode</b> Use only with MX and Cummins engines	0	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0	0
1002060	S	<b>Air compressor: Cummins 18.7 CFM FOR Cummins AND PACCAR PX engines.</b>	0	0
1051092	S	<b>Engine mount Powercore air cleaner.</b> w/constant torque SS clamps, pop-up air restriction indicator. Pop-up indicator is standard.	0	0
1105230	O	<b>Fan Hub: Horton 2-Speed for ISL9, ISL-G, PX-8 or PX-9</b>	417	0
1121200	O	<b>Cooling module: 1000 square inches</b> T170/T270/T370/T470. Includes metal surge tank on T170/T270/T370.	-398	0
1247166	S	<b>EXH: RH UNDER DPF/SCR W/ RH SIDE OF CAB VERTICAL TAILPIPE WITH DAYCABS, EXTENDED DAYCABS, OR MODULAR SLEEPERS, 2017 EPA</b>	0	0
1290136	S	<b>Tailpipe: 5 in. single 36 in. 45 degree curved.</b>	0	0
1321145	O	<b>Fuel Filter:Fleetguard FS1003</b> Fuel/Water Separator for PX-9	0	0
1321200	O	<b>Run Aid:None</b> *For Fuel Filter	0	0
1321305	O	<b>Start Aid:12V Heat</b> *For Fuel Filter	46	1
1500029	O	<b>Kenworth Fuel Cooler</b> Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	191	6
1504002	O	<b>Immersion block heater 120V 1000W w/plug under door on C500, T660, T800 &amp; W900.</b>	112	0
1816260	O	<b>Alternator: PACCAR 160 amp, brush type</b>	0	0
1825623	O	<b>Batteries: 3 Optima 31A Threaded post (900) 2700 CCA.</b>	1,038	66

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:17:00 AM **Incomplete** Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q60145586  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
1836100	S	<b>Starter: PACCAR 12 volt electrical system. W/</b> centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
1900082	O	<b>Multi-function engine connector for body builder</b> interface for Cummins.	53	0
1900089	O	<b>Connect BTWN C/I PTO SW &amp; Eng,Warn LMP use</b> 1900086 W/PTO Cntrl, REQs 1900082 OR 84	140	0

#### Transmission & Clutch

2011205	O	<b>Transmission: Allison 3000RDS 6-speed</b> w/PTO drive gear. 5th Gen controls. Includes heat exchanger & oil level sensor. Rugged Duty Series for vocational applications. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions. Requires a push button shift control code. Oil temperature gauge is standard on class 8 models.	14,056	291
2406453	O	<b>Driveline: 2 Dana SPL250XL 1 centerbearing</b> requires 3500057 interaxle driveline. Low maintenance offering from Spicer. On-highway 350K mi first service interval, 100K mi subsequent service interval on U-joint, splines lubed for life for life, quick disconnect end caps.	1,056	0
2410018	O	<b>Torque converter included w/Allison</b> Transmission.	0	0
2410151	O	<b>Pushbutton control center console mounted.</b> Class 8 with Allison Transmission.	0	0
2410203	O	<b>Allison FuelSense Base: Includes EcoCal, 5th Gen</b> Controls, and Dynamic Shift Sensing	0	0
2429038	O	<b>PTO adapter for front engine PTO.</b>	344	8
2429100	O	<b>Chassis will be fitted w/LH transmission PTO.</b> (PREVENTS ECU F/INTERFERING W/PTO ONLY)	0	0
2490009	O	<b>07/01/16 List Credit for code 2406453</b> 2 Dana SPL250XL D/L W/1 C/B	-151	0

#### Front Axle & Equipment

2517020	O	<b>Meritor MFS20 Front Axle rated 20K</b> 3.5in. DROP. Standard Track.	1,794	150
2607002	O	<b>Front Brakes: 14,601-22K Bendix air disc brakes.</b>	323	10
2690025	O	<b>Splined rotor for front air disc brakes for use</b> with iron hubs.	-62	0
2702020	O	<b>Front Hubs Iron hub pilot 20,000 lbs. 10 Bolt</b> 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	268	80
2741970	S	<b>ConMet PreSet Plus Hub package; front axle.</b>	0	0
2750001	S	<b>Hubcap: front vented.</b>	0	0
2769000	S	<b>Slack Adjusters included w/ front axle or brake.</b>	0	0

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Crombie		Version Number:	38.21



Data	Code	Description	\$ List	Weight
2866020	O	<b>Front Springs: Taperleaf 20K w/ shock absorbers</b> w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. W900S only. Not available on W900L. W900B use 2866021.	1,092	241
2895202	O	<b>Dual power steering gears: 20K Sheppard M100P.</b>	1,086	70
2899336	O	<b>Power Steering Cooler:Radiator Mounted Air-to-Oil</b> 2007 and later engines only.	278	11

#### Rear Axle & Equipment

3122247	O	<b>Dual Meritor MT40-14x4 Hypoid rear axle</b> rated at 40K, with heavy-wall housing. Tandem rear axles.	8,660	1,989
3200614	O	<b>Rear Axle Ratio - 6.14.</b>	0	0
3334004	O	<b>Dual Rear Brakes 16-1/2x7 in. to 46K;</b> Bendix ES-extended service S-cam.	0	0
3392005	O	<b>Dual Rear Brake Drums: cast.</b>	0	0
3407050	O	<b>Dual Rear Hubs: Aluminum hub pilot 46K</b> 11-1/4 in. bolt circle.	0	0
3441972	O	<b>ConMet PreSet Plus Hub package; dual rear axle.</b>	0	0
3465002	O	<b>Dual Rear axle automatic slack adjusters.</b>	0	0
3485207	O	<b>Spring Brake: 3030 long stroke dual 30 square</b> inches travel; replaces standard 2-1/2 in. travel. Helps keep brakes in adjustment longer.	25	4
3490047	O	<b>Dustshields for drum brakes: all rear axles.</b>	84	11
3495226	S	<b>Bendix 4S/4M anti-lock brake system.</b>	0	0
3500057	O	<b>Interaxle driveline 1 Dana SPL170XL</b>	423	-4
3511420	O	<b>Driver Controlled Differential Lock (Crosslock)</b> for Meritor Axles 40K to 52K forward rear & rear rear axle. Under Speed Interlock is standard on T680.	2,131	39
3736418	O	<b>Rear suspension: Tandem Reyco 102 40K.</b> 4-spring multileaf & 52 in. axle spacing. Steel crossmembers & gussets. Unladen Height: 10.8 in. Laden Height: 9.2 in.	2,006	500

#### Tires & Wheels

4038675	O	<b>Front tires: Goodyear G296 MSA 425/65R22.5 20PR.</b> 44.4 in. diameter 20.6 in. SLR. all position. On/Off highway. Wide-base tire.	655	148
4230011	O	<b>RR: GOODYEAR G182 RSD GHG 11R22.5 16PR</b>	380	160
4900008	O	<b>Rear Tire Quantity: 8</b>	0	0
5045216	O	<b>Front wheel: Alcoa 82362 22.5x12.25 aluminum,</b> with Lvl One [TM] finish, hub pilot mount. 11400lb. maximum rating. Super single. Standard track axles may be over 102 in. w/425 tires. Air disc brake compatible.	643	-10
5249999	U	<b>Need sales code 5245162. Alcoa rear alu</b> minum wheels	1,400	-176

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Crombie		Version Number:	38.21



Data	Code	Description	\$ List	Weight
5853906	O	<b>Powder coat white steel wheel. Use in conjunction</b> with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0	0
5900008	O	<b>Rear Wheel/Rim Quantity: 8</b>	0	0
<b>Frame &amp; Equipment</b>				
6056400	O	<b>Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in.</b> to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	337	312
6141400	O	<b>Full Steel Insert: for 10-5/8 in. or 10-3/4 in.</b> Steel 285 in. to 336 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in.-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model: T660, T680, T800, T880 = 21.26 in.; C500B = bumper setting minus 0.79 in.; W900B = 5.27 in., W900L = 1.50 in., W900S = 3.27 in.; T440/T470 50 in. bumper setting = 21.26 in., T470 73 in. bumper setting = 72.3 in.	1,431	642
6309910	O	<b>Delete bumper: Requires a bumper setting code.</b>	-305	-94
6319073	O	<b>73 in. Bumper setting. Requires a bumper code.</b>	0	0
6390033	O	<b>T470 W/ extended front frame rail. Must code</b> for rail separately.	0	0
6390110	O	<b>Mudflaps, Front: Extra wide for use w/ tires that</b> are wide base singles.	55	6
6405000	O	<b>In-cab steel battery box: under rider seat or in</b> stand alone box. Requires appropriate AGM battery code, which varies by model, and appropriate rider seat code be selected prior to entering the workscreen. Includes 1 battery disconnect switch.	1,704	-9
6409906	O	<b>In-Cab battery box location: Under rider seat.</b>	0	0
6451090	S	<b>T470,C5, T6, T8 non-polished DPF/SCR or CNG cover</b> diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components.	105	30
6490416	O	<b>Heavy-duty rear cab supports: W/steel</b> crossmembers & aluminum gussets.	96	26
6721125	O	<b>Delete Mudflap Arms: dealer/customer responsible</b> for installation of arms.	-27	-12
6723000	O	<b>Delete Mudflap Shields-Dealer/Customer</b> responsible for installation of shields.	0	-8
6742009	S	<b>Square end-of-frame w/ o crossmember;non-towing.</b>	0	0

**Fuel Tanks & Equip**

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Crombie		Version Number:	38.21



Data	Code	Description	\$ List	Weight
7210075	O	<b>Fuel Tank: 75 US gallon 24.5in. aluminum under</b> replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	377	-33
7722005	O	<b>DEF tank 6.9 clear BOC [CBOC], requires LH under</b> cab fuel tank. This tank has 6.9 gallons of useable volume. The tank will be located inboard of the LH under cab fuel tank. There is no frame space required to locate this tank. Not for use on sleeper chassis. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	40	-23
7889203	O	<b>Standard DEF to fuel fill ratio: 2:1 or greater.</b>	0	0
7889604	O	<b>DEF tank location is on the LH.</b>	0	0
7920075	O	<b>Location: 75 gal fuel tank LH under cab</b>	0	0
<b>Cab &amp; Equipment</b>				
8024310	S	<b>Cab: Curved Glass Conventional.</b> Cab Includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinges. Single electric horn standard. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics. Warning alarm will sound when lights are left on.	0	0
8090410	O	<b>Hood: T470 Sloped Hood for straight rail.</b> Includes radiator mounted grille, split fenders, mudflaps, & separate bumper.	531	0
8108010	S	<b>Cab heater: W/integral defrosters &amp; A/C 45,000</b> btu cab heater. No sleeper heater/AC. Includes 5 mode rotary control. T660 include filter media.	0	0
8201013	S	<b>Steering wheel: 18 in. 4-spoke.</b>	0	0
8201200	O	<b>Adjustable telescoping tilt steering column.</b>	361	10
8208498	O	<b>Five spare switches: Wired to power.</b>	159	0
8222712	O	<b>Gauge: Fuel filter restriction gauge.</b>	122	0
8282004	S	<b>KW Driver Information Center: Includes fuel</b> economy, RPM display, trip information, truck information, diagnostics, gear display, alarm clock.	0	0
8282009	S	<b>Instrument package: Includes speedometer,</b> tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010+ engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0	0
8282107	S	<b>Large flat panel on dash For customer-installed</b> controls. Reduces gauge count by 6.	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:17:00 AM *Incomplete* Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q60145586  
Prepared by: Dan Cromble Version Number: 38.21



Data	Code	Description	\$ List	Weight
8331140	S	<b>Cab Interior: Summit. T440/T470 Only. Includes</b> smooth upholstered side & back panels w/stitched accent lines, upholstered door pads, full vinyl headliner, black dash panels & black rubber floor mats.	0	0
8343304	S	<b>Interior color: Slate Gray w/trim Dark Slate Gray</b>	0	0
8410091	S	<b>Driver seat: Kenworth Air cushion Plus HB cloth.</b> Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6- 23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted and includes a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	0	0
8450090	O	<b>Rider seat: Kenworth Plus battery box HB cloth.</b> Standard features include fixed base and backrest, fixed seat base and backrest, and dual armrests. Seat cushion is 19.5 inches. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted with a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Grey seat belts.	83	-35
8490110	S	<b>Seat color: Dark Slate Gray.</b>	0	0
8601421	O	<b>Kenworth Radio with AM/FM/WB/USB and Bluetooth</b>	403	4
8699926	O	<b>CB installation kit: Center mounted of header.</b> W/header mounted quick release CB mount. One red power post & one black ground post. Includes dual antenna leads located on the mirror brackets. Includes dual antenna & separate speaker.	240	0
8700108	O	<b>Under dash center console: Includes one cupholder</b> & two 12V outlets. For use w/Autoshift, Ultrashift, & Allison Gen IV only.	26	0
8700168	S	<b>Non-self cancelling turn signal: W/column-mounted</b> headlight dimmer switch & intermittent wiper control.	0	0
8700186	S	<b>Electric LH &amp; RH door locks.</b>	0	0
8800200	S	<b>Cab access contoured grabhandles, LH/RH.</b>	0	0
8800400	S	<b>Grabhandle LH inside door frame above dash.</b>	0	0
8800401	S	<b>Grabhandle RH inside door frame above dash.</b>	0	0
8832115	O	<b>DAYLITE DOOR: LH/RH INCL RH PEEPER WINDOW</b>	0	0
8841618	O	<b>Dual rectangular air horn 23 in. LH &amp; RH top of</b> roof. Includes air horn covers.	193	4
8850300	S	<b>Look-Down, Pass. Door, Stainless 8.5x4.4</b>	0	0
8863570	O	<b>Dual convex heated mirror 8.5 inch w/ offset</b> mounting below regular mirror.	75	11
8866101	O	<b>Mirror: Dual Prutsman mirror 7 in. x 16 in.</b> polished stainless steel, thermostatically controlled. switch located on door pad.	44	0
8869005	S	<b>Mirror brackets 8-1/2 ft load width.</b>	0	0
8871438	S	<b>Rear Cab Stationary Window 17 in. x 36 in.</b>	0	0

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 12/15/2016 8:17:00 AM *Incomplete* Model Number: T400 Series Conventional.  
Effective Date: Jul 1, 2016 Quote/DTPO/CO: Q60145586  
Prepared by: Dan Crombie Version Number: 38.21



Data	Code	Description	\$ List	Weight
8879213	O	<b>Electric-powered LH &amp; RH door window lifts.</b> Switch located on door.	311	0
8890100	S	<b>One-piece windshield, w/ curved glass.</b>	0	0
8890135	O	<b>Exterior stainless steel sunvisor.</b>	537	11
8890351	O	<b>2 in. rubber wheelwell fender extension.</b>	161	8

**Lights & Instruments**

9010801	S	<b>Headlamps: Halogen Projector Low Beam, Halogen</b> Complex Reflector High Beam	0	0
9022137	O	<b>Marker Lights: Five, rectangular, LED</b>	100	0
9030010	S	<b>Turn Signal Lights: Mounted on fender</b>	0	0
9052011	O	<b>Dual Flush Floodlights: First set.</b>	123	2
9059911	O	<b>Floodlight Location: Located mid - first set.</b>	0	0
9070138	S	<b>Combination Stop, Tail, Turn &amp; Backup Lights RH</b> & LH.	0	0
9090039	S	<b>Marker Lights: Interrupter Switch.</b> Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
9090126	O	<b>Electric Backup Alarm: Meets SAE J994 &amp; OSHA</b> requirements.	145	4
9090302	O	<b>Junction Box: Mounted Behind Cab or Sleeper</b> Not Mounted at End of Frame.	132	1
9090845	O	<b>Circuit Breakers: Replacing fuses. Does not</b> apply to any 5-amp fuse box position. Breakers include stop/brake/turn, tail lamp, high & low beams, marker/clearance lamps, horn, fuel heat, gauges, air dryer, HVAC controls, panel lamps. Some circuits will remain fuses.	39	0

**Air Equipment**

9101215	S	<b>Air Dryer Bendix AD-IS heated Puraguard</b>	53	0
9108001	S	<b>Moisture ejection valve w/ pull cable drain.</b>	0	0
9110020	O	<b>Full truck kit: Gladhands mounted at end-of-</b> frame.Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	595	15
9140020	S	<b>Nylon air tubing in frame &amp; cab, excluding hoses</b> subject to excessive heat or flexing.	0	0
9140328	O	<b>Trailer ABS electric supply through SAE J560</b> 7-pin connector per TMC RP137).	0	0

**Extended Warranty**

9200021	O	<b>Standard Warranty.</b>	0	0
---------	---	---------------------------	---	---

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Cromble		Version Number:	38.21



Data	Code	Description	\$ List	Weight
<b>Miscellaneous</b>				
9409852	O	<b>GHG Secondary Manufacturer: Does Not Apply</b>	0	0
<b>Paint</b>				
9700000	O	<b>Paint color number.</b> N97020 A - L2225 CANDY APPLE R N97200 FRAME N0001 BLACK	0	0
9943051	O	<b>Day Cab Premium Paint</b>	200	0
9944820	O	<b>1 - Color Paint - Day Cab</b> Color will be White if no other color is specified.	0	0
9965510	S	<b>Base coat/clear coat.</b> The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

Total Adjusted Price (W/O Freight & Warranty & Surcharges)	\$169,659
Freight Charge	\$2,225
Options Not Subject to Discount	\$0
Surcharges Not subject to Discount	\$0
Total Weight	16067 lb

**Prices and Specifications Subject to Change Without Notice.**

Unpublished options may require review/approval.  
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	12/15/2016 8:17:00 AM	<b>Incomplete</b>	Model Number:	T400 Series Conventional.
Effective Date:	Jul 1, 2016		Quote/DTPO/CO:	Q60145586
Prepared by:	Dan Crombie		Version Number:	38.21

**Prepared for:**  
Jenny Schultz  
Columbus DPW  
105 N Dickason Boulevard  
Columbus, WI 53925  
Phone: 920-623-5900


**Prepared by:**  
Dylan Glindinning  
TRUCK COUNTRY OF  
WISCONSIN  
9202 N. 107TH STREET  
MILWAUKEE, WI 53224  
Phone: 4147613384

*A proposal for*  
**Columbus DPW**

*Prepared by*  
**TRUCK COUNTRY OF WISCONSIN**  
*Dylan Glindinning*

*Dec 19, 2016*

**Western Star 4700SB**

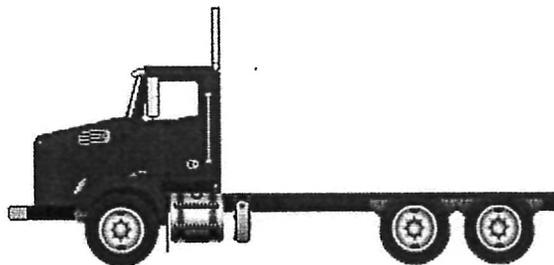

Components shown may not reflect all spec'd options and are not to scale

**\$96,498.00**

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

## S P E C I F I C A T I O N   P R O P O S A L

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Price Level</b>				
PRL-15T	WESTERN STAR 4700 PRL-15T (EFF:10/25/16)			STD
<b>Data Version</b>				
DRL-005	SPECPRO21 DATA RELEASE VER 005			N/C
<b>Vehicle Configuration</b>				
001-451	4700 SET-BACK FRONT AXLE CHASSIS	9,215	6,630	\$162,060.00
004-218	2018 MODEL YEAR SPECIFIED			N/C
002-004	SET BACK AXLE - TRUCK			STD
019-002	STRAIGHT TRUCK PROVISION			STD
003-001	LH PRIMARY STEERING LOCATION			STD
<b>General Service</b>				
AA1-002	TRUCK CONFIGURATION			STD
AA6-001	DOMICILED, USA 50 STATES (INCLUDING CALIFORNIA AND CARB OPT-IN STATES)			STD
A85-011	CONSTRUCTION SERVICE			STD
A84-1GM	GOVERNMENT BUSINESS SEGMENT			N/C
AA4-003	DRY BULK COMMODITY			STD
AA5-002	TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS			STD
AB1-008	MAXIMUM 8% EXPECTED GRADE			STD
AB5-001	SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE			STD
995-1A5	WESTERN STAR VOCATIONAL WARRANTY			STD
A66-99D	EXPECTED FRONT AXLE(S) LOAD : 20000.0 lbs			
A68-99D	EXPECTED REAR DRIVE AXLE(S) LOAD : 40000.0 lbs			
A63-99D	EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 60000.0 lbs			
<b>Truck Service</b>				
AA3-004	END DUMP BODY			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Engine</b>				
101-22V	CUM L9 370 HP @ 2000 RPM, 2100 GOV RPM, 1250 LB/FT @ 1400 RPM	-850	-70	(\$4,724.00)
<b>Electronic Parameters</b>				
79A-075	75 MPH ROAD SPEED LIMIT			N/C
79B-000	CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT			N/C
79P-002	PTO RPM WITH CRUISE SET SWITCH - 700 RPM			N/C
79Q-003	PTO RPM WITH CRUISE RESUME SWITCH - 800 RPM			N/C
79S-001	PTO MODE CANCEL VEHICLE SPEED - 5 MPH			N/C
79U-007	PTO GOVERNOR RAMP RATE - 250 RPM PER SECOND			N/C
80G-002	PTO MINIMUM RPM - 700			N/C
80J-002	REGEN INHIBIT SPEED THRESHOLD - 5 MPH			N/C
<b>Engine Equipment</b>				
99C-017	2016 ONBOARD DIAGNOSTICS/2010 EPA/CARB/FINAL GHG17 CONFIGURATION			STD
99D-011	2008 CARB EMISSION CERTIFICATION - CLEAN IDLE (INCLUDES 6X4 INCH LABEL ON LOWER FORWARD CORNER OF DRIVER DOOR)			\$106.00
13E-001	STANDARD OIL PAN			STD
105-001	ENGINE MOUNTED OIL CHECK AND FILL			STD
133-004	ONE PIECE VALVE COVER			STD
014-108	SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER WITH SAFETY ELEMENT AND INSIDE/OUTSIDE AIR WITH SNOW DOOR	10		\$367.00
124-1D7	DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE			STD
292-148	(3) ALLIANCE ABSORBED GLASS MAT MODEL 7A31, GROUP 31, 12 VOLT MAINTENANCE FREE 2190 CCA THREADED STUD BATTERIES			STD
290-1AC	PASSENGER SEAT BATTERY BOX VENTED TO OUTSIDE OF CAB			STD
282-013	BATTERY BOX MOUNTED UNDER PASSENGER SEAT			STD
291-017	WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN			STD
289-006	PLASTIC BATTERY BOX COVER			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
293-058	POSITIVE LOAD DISCONNECT WITH CAB MOUNTED CONTROL SWITCH MOUNTED OUTBOARD DRIVER SEAT	8		\$231.00
295-029	POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER	2		\$86.00
107-032	CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE			N/C
131-013	AIR COMPRESSOR DISCHARGE LINE			STD
152-041	ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM			STD
128-076	CUMMINS EXHAUST BRAKE INTEGRAL WITH VARIABLE GEOMETRY TURBO WITH ON/OFF DASH SWITCH	20		N/C
016-1C2	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE			STD
28F-002	ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH			STD
239-038	11 FOOT 06 INCH (138 INCH+0/-5.9 INCH) EXHAUST SYSTEM HEIGHT			STD
237-1CR	RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP			STD
23U-001	6 GALLON DIESEL EXHAUST FLUID TANK			STD
30N-003	100 PERCENT DIESEL EXHAUST FLUID FILL			STD
23Y-001	STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING			STD
43X-002	LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION			STD
242-001	STAINLESS STEEL AFTERTREATMENT DEVICE/MUFFLER/TAILPIPE SHIELD			STD
273-018	HORTON DRIVEMASTER ADVANTAGE ON/OFF FAN DRIVE			N/C
276-002	AUTOMATIC FAN CONTROL WITH DASH SWITCH AND INDICATOR LIGHT, NON ENGINE MOUNTED			\$18.00
110-003	CUMMINS SPIN ON FUEL FILTER			N/C
118-008	COMBINATION FULL FLOW/BYPASS OIL FILTER			N/C
266-017	1300 SQUARE INCH ALUMINUM RADIATOR	-20		N/C
267-006	MOUNTING FOR FIREWALL MOUNTED SURGE TANK			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
103-039	ANTIFREEZE TO -34F, OAT (NITRITE AND SILICATE FREE) EXTENDED LIFE COOLANT			STD
171-007	GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT			STD
172-001	CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES			STD
270-016	RADIATOR DRAIN VALVE			N/C
168-002	LOWER RADIATOR GUARD			STD
360-016	1310 ADAPTER FLANGE FOR FRONT PTO PROVISION	10		\$1,458.00
138-011	PHILLIPS-TEMRO 1000 WATT/115 VOLT BLOCK HEATER	4		N/C
166-002	PHILLIPS-TEMRO 150 WATT/115 VOLT OIL PREHEATER	4		N/C
140-022	CHROME ENGINE HEATER RECEPTACLE MOUNTED UNDER LH DOOR			STD
134-001	ALUMINUM FLYWHEEL HOUSING			STD
132-004	ELECTRIC GRID AIR INTAKE WARMER			N/C
155-058	DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH	-10		N/C
<b>Transmission</b>				
342-582	ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION	-110	-35	\$7,691.00
<b>Transmission Equipment</b>				
343-340	ALLISON VOCATIONAL PACKAGE 224 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODEL RDS			N/C
84B-002	ALLISON VOCATIONAL RATING FOR CONCRETE MIXER APPLICATIONS ONLY AVAILABLE WITH 3000 PRODUCT FAMILIES			N/C
84C-023	PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
84D-023	SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			N/C
84E-000	PRIMARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84F-000	SECONDARY SHIFT SCHEDULE RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
84G-000	PRIMARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84H-000	SECONDARY SHIFT SPEED RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE			N/C
84L-000	LOAD BASED SHIFT SCHEDULE AND VEHICLE ACCELERATION CONTROL RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED VOCATIONAL USAGE			N/C
353-061	BODY LIGHTING INTERFACE BLUNT CUT WIRING WITH FUSE PANEL WIRE MOUNTED BETWEEN DRIVER AND PASSENGER SEATS WITH ADDITIONAL 150 AMP SERVICE			\$525.00
34C-010	ELECTRONIC TRANSMISSION CUSTOMER ACCESS CONNECTOR, BLUNT CUT, MOUNTED BETWEEN DRIVER AND PASSENGER SEATS			\$173.00
341-018	MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN			N/C
345-003	PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED			N/C
97G-004	TRANSMISSION PROGNOSTICS - ENABLED 2013			N/C
370-015	WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK			STD
346-003	TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK			N/C
35T-001	SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)			N/C

#### Front Axle and Equipment

400-1BB	DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE			\$1,487.00
402-030	MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			STD
403-002	NON-ASBESTOS FRONT BRAKE LINING			STD
419-023	CONMET CAST IRON FRONT BRAKE DRUMS			STD
409-021	SKF SCOTSEAL PLUS XL FRONT OIL SEALS			STD
408-001	VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL			STD
416-022	STANDARD SPINDLE NUTS FOR ALL AXLES			STD
405-003	HALDEX AUTOMATIC FRONT SLACK ADJUSTERS			STD
406-001	STANDARD KING PIN BUSHINGS			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
536-055	TRW THP-60 POWER STEERING WITH RCH45 AUXILIARY GEAR	90		N/C
539-003	POWER STEERING PUMP			STD
534-003	4 QUART POWER STEERING RESERVOIR			N/C
533-001	OIL/AIR POWER STEERING COOLER			N/C
40T-003	SYNTHETIC 50W FRONT AXLE LUBE			STD
<b>Front Suspension</b>				
620-006	20,000# FLAT LEAF FRONT SUSPENSION	50		\$147.00
619-004	GRAPHITE BRONZE BUSHINGS WITH SEALS - FRONT SUSPENSION			STD
410-001	FRONT SHOCK ABSORBERS			\$215.00
<b>Rear Axle and Equipment</b>				
420-1K3	MT-40-14X 40,000# R-SERIES TANDEM REAR AXLE		-40	\$280.00
421-614	6.14 REAR AXLE RATIO			N/C
424-003	IRON REAR AXLE CARRIER WITH OPTIONAL HEAVY DUTY AXLE HOUSING			STD
386-076	MXL 17N MERITOR EXTENDED LUBE MAIN DRIVELINE WITH FULL ROUND YOKES	-30	-30	\$347.00
388-073	MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES			STD
452-006	DRIVER CONTROLLED TRACTION DIFFERENTIAL - BOTH TANDEM REAR AXLES		30	\$1,303.00
878-023	(1) INTERAXLE LOCK VALVE, (1) DRIVER CONTROLLED DIFFERENTIAL LOCK FORWARD-REAR AND REAR-REAR AXLE VALVE			N/C
87A-005	INDICATOR LIGHT FOR EACH INTERAXLE LOCKOUT SWITCH			STD
87B-008	INDICATOR LIGHT FOR EACH DRIVER CONTROLLED TRACTION DEVICE SWITCH			N/C
423-020	MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			STD
433-002	NON-ASBESTOS REAR BRAKE LINING			STD
434-011	BRAKE CAMS AND CHAMBERS ON FORWARD SIDE OF DRIVE AXLE(S)			N/C
451-023	CONMET CAST IRON REAR BRAKE DRUMS			STD
440-021	SKF SCOTSEAL PLUS XL REAR OIL SEALS			STD
426-075	HALDEX GOLDSEAL LONGSTROKE 2-DRIVE AXLES SPRING PARKING CHAMBERS			STD
428-003	HALDEX AUTOMATIC REAR SLACK ADJUSTERS			STD
41T-002	SYNTHETIC 75W-90 REAR AXLE LUBE			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Rear Suspension</b>				
622-1A0	TUFTRAC 40,000# REAR SPRING SUSPENSION		390	\$2,789.00
621-055	TUFTRAC STANDARD RIDE HEIGHT			N/C
431-003	AXLE CLAMPING GROUP			N/C
624-009	54 INCH AXLE SPACING			N/C
623-006	FORE/AFT AND TRANSVERSE CONTROL RODS			N/C
439-002	REAR SHOCK ABSORBERS - TWO AXLES (TANDEM)		40	\$186.00
<b>Brake System</b>				
490-100	WABCO 4S/4M ABS WITHOUT TRACTION CONTROL			STD
871-001	REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES			STD
904-001	FIBER BRAID PARKING BRAKE HOSE			STD
412-001	STANDARD BRAKE SYSTEM VALVES			STD
432-003	RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE			STD
480-009	BW AD-9 BRAKE LINE AIR DRYER WITH HEATER	20		N/C
483-003	BENDIX OIL COALESCING FILTER FOR AIR DRYER			\$19.00
479-015	AIR DRYER FRAME MOUNTED			STD
460-001	STEEL AIR BRAKE RESERVOIRS			STD
477-004	PULL CABLES ON ALL AIR RESERVOIR(S)			\$23.00
485-037	CAB BLOW OUT KIT WITH AIR HOSE AND NOZZLE INSIDE LH CAB ENTRY DOOR	2		\$94.00
<b>Wheelbase &amp; Frame</b>				
545-465	4650MM (183 INCH) WHEELBASE			N/C
546-1B2	1/2X3.64X11-7/8 INCH STEEL FRAME (12.7MMX301.6MM/0.5X11.88 INCH) 120KSI	350	200	\$1,787.00
547-034	PARTIAL INNER FRAME REINFORCEMENT AT FRONT SUSPENSION	195	-5	\$979.00
552-030	1600MM (63 INCH) REAR FRAME OVERHANG			STD
55W-006	FRAME OVERHANG RANGE: 61 INCH TO 70 INCH			N/C
549-002	24 INCH INTEGRAL FRONT FRAME EXTENSION	122	-10	\$941.00
AC8-99D	CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 119.69 in			
AE8-99D	CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 116.69 in			
AE4-99D	CALC'D FRAME LENGTH - OVERALL : 315.61			

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
AM6-99D	CALC'D SPACE AVAILABLE FOR DECKPLATE : 119.69 in			
FSS-0LH	CALCULATED FRAME SPACE LH SIDE : 60.15 in			N/C
FSS-0RH	CALCULATED FRAME SPACE RH SIDE : 98.52 in			N/C
553-001	SQUARE END OF FRAME			STD
559-001	STANDARD WEIGHT ENGINE CROSSMEMBER			STD
561-001	STANDARD CROSSMEMBER BACK OF TRANSMISSION			STD
562-001	STANDARD MIDSHIP #1 CROSSMEMBER(S)			STD
572-001	STANDARD REARMOST CROSSMEMBER			STD
565-002	HEAVY DUTY SUSPENSION CROSSMEMBER			STD
568-001	STANDARD WEIGHT REAR SUSPENSION CROSSMEMBER			STD

#### Chassis Equipment

556-997	OMIT FRONT BUMPER, CUSTOMER INSTALLED SPECIAL BUMPER, DOES NOT COMPLY WITH FMCSR 393.203	-110		(\$786.00)
586-015	FRONT ANTI-SPRAY CAB MOUNTED MUDFLAPS			STD
551-007	GRADE 8 THREADED HEX HEADED FRAME FASTENERS			STD

#### Fuel Tanks

204-151	60 GALLON/227 LITER ALUMINUM FUEL TANK - LH			STD
218-006	25 INCH DIAMETER FUEL TANK(S)			STD
215-005	PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH PAINTED BANDS			STD
212-007	FUEL TANK(S) FORWARD			STD
664-001	PLAIN STEP FINISH			STD
205-001	FUEL TANK CAP(S)			STD
122-1H7	DAVCO 245 FUEL/WATER SEPARATOR WITH WATER IN FUEL SENSOR	20		N/C
216-020	EQUIFLO INBOARD FUEL SYSTEM			STD
202-016	HIGH TEMPERATURE REINFORCED NYLON FUEL LINE			STD
221-001	FUEL COOLER			STD

#### Tires

093-0RW	MICHELIN XZA2 ENERGY 315/80R22.5 20 PLY RADIAL FRONT TIRES	56		\$226.00
094-2DY	CONTINENTAL HDC1 11R22.5 16 PLY RADIAL REAR TIRES		136	(\$888.00)

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Hubs</b>				
418-056	CONMET PRESET PLUS IRON FRONT HUBS			STD
450-056	CONMET PRESET PLUS IRON REAR HUBS			STD
<b>Wheels</b>				
502-355	ACCURIDE 41012 22.5X9.00 10-HUB PILOT 3.12 INSET 10-HAND ALUMINUM DISC FRONT WHEELS	-38		\$226.00
505-593	ACCURIDE 40008 22.5X8.25 10-HUB PILOT 10-HAND HD ALUMINUM DISC REAR WHEELS		-128	\$1,432.00
496-011	FRONT WHEEL MOUNTING NUTS			STD
497-011	REAR WHEEL MOUNTING NUTS			STD
<b>Cab Exterior</b>				
829-1A8	110 INCH BBC STEEL CONVENTIONAL CAB			STD
82A-023	WESTERN STAR PAINTED ALUMINUM CAB SKIRT			STD
650-044	AIR CAB MOUNTS WITH CHECK VALVE			STD
648-002	NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE			STD
667-001	FRONT FENDERS			STD
754-001	2 INCH FENDER EXTENSIONS	5		\$89.00
678-034	LH AND RH EXTERIOR GRAB HANDLES WITH RUBBER INSERTS AND RH INTERIOR GRAB HANDLE MOUNTED TO A POST			STD
646-008	STATIONARY BRIGHT FINISH GRILLE			STD
65X-003	CHROME HOOD MOUNTED AIR INTAKE GRILLE			STD
640-008	GALVANEALD STEEL SEVERE SERVICE CAB			STD
644-004	FIBERGLASS HOOD			STD
690-002	TUNNEL/FIREWALL LINER			\$37.00
727-012	DUAL HADLEY SD-978 26 INCH RECTANGULAR AIR HORNS			STD
726-001	SINGLE ELECTRIC HORN			STD
728-002	DUAL HORN SHIELDS			STD
657-1AG	DOORS AND IGNITION KEYED THE SAME			STD
575-001	REAR LICENSE PLATE MOUNT END OF FRAME			STD
312-072	SINGLE RECTANGULAR SEALED BEAM HEADLIGHTS WITH BRIGHT BEZELS			STD
302-001	(5) AMBER MARKER LIGHTS			STD
314-824	WIRING AND SWITCH FOR CUSTOMER FURNISHED SNOW PLOW LAMPS WITH DUAL CONNECTIONS AT BUMPER			\$182.00

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
311-001	DAYTIME RUNNING LIGHTS			\$56.00
294-001	INTEGRAL STOP/TAIL/BACKUP LIGHTS			STD
300-015	STANDARD FRONT TURN SIGNAL LAMPS			STD
744-008	DUAL STAINLESS STEEL HEATED MIRRORS			\$44.00
797-001	DOOR MOUNTED MIRRORS			STD
796-001	102 INCH EQUIPMENT WIDTH			STD
743-1AA	LH AND RH SUREPLUS 574 8 INCH BRIGHT FINISH HEATED CONVEX MIRRORS WITH SEPARATE ADJUSTMENT, MOUNTED BELOW MIRROR			\$36.00
74A-001	RH DOWN VIEW MIRROR			STD
74B-1B4	RH AND LH 8 INCH HEATED STAINLESS STEEL FENDER MOUNTED CONVEX MIRRORS WITH TRIPOD BRACKETS	12		\$351.00
729-001	STANDARD SIDE/REAR REFLECTORS			STD
764-001	FIBERGLASS EXTERIOR SUN VISOR	24		\$241.00
768-046	17.5X35 INCH TINTED REAR WINDOW			STD
661-006	TINTED DOOR GLASS			STD
654-011	RH AND LH ELECTRIC POWERED WINDOWS	4		\$151.00
769-002	LOWER RH DOOR WINDOW WITH FRESNEL LENS	7		\$89.00
663-023	2-PIECE TINTED CURVED GASKET MOUNTED HEATED WINDSHIELD			\$473.00
659-025	2 GALLON WINDSHIELD WASHER RESERVOIR WITHOUT FLUID LEVEL INDICATOR, MOUNTED UNDER CAB, WITH REMOTE FILL			STD
<b>Cab Interior</b>				
707-1D4	SMOKY MOUNTAIN GRAY VINYL PREMIUM INTERIOR			\$163.00
70K-005	BLACK HARD TRIM			STD
706-049	BASE LEFT HAND DOOR TRIM			STD
708-049	BASE RIGHT HAND DOOR TRIM			STD
772-006	BLACK MATS WITH SINGLE INSULATION			STD
785-007	DASH MOUNTED ASH TRAY AND LIGHTER, DRIVER SIDE			STD
691-001	FORWARD ROOF MOUNTED CONSOLE			STD
694-009	PASSENGER SIDE WING DASH MOUNTED GLOVE BOX WITH LOCKING DOOR			STD
693-025	LH AND RH DOOR MAP POCKETS			STD
741-029	COAT HOOK ON RH BACKWALL OF CAB			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
742-032	(1) DOUBLE CUP HOLDER WITH CELL PHONE HOLDER LH OR RH DASH			\$52.00
680-034	TWO-TONE CHARCOAL UPPER/COOL GRAY LOWER SOFT TOUCH WING DASH WITH BLACK DRIVER SIDE COSMETIC UNDER DASH COVER			STD
320-004	STANDARD WIRING			STD
700-023	HEATER, DEFROSTER AND AIR CONDITIONER WITH CONSTANT TEMPERATURE CONTROL AND COSMETIC COVER			STD
701-010	HVAC DUCTING WITH FOAM MAIN FRESH AIR FILTER AND OUTSIDE PRE-FILTER			STD
703-005	MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH			STD
170-019	STANDARD HEATER PLUMBING WITH BALL SHUTOFF VALVES			\$28.00
130-033	DENSO HEAVY DUTY AIR CONDITIONER COMPRESSOR			STD
698-001	RADIATOR MOUNTED AIR CONDITIONER CONDENSER			STD
702-002	BINARY CONTROL, R-134A			STD
739-002	ADDITIONAL CAB SIDEWALL INSULATION	60	10	\$162.00
285-019	AUTOMATIC SELF-RESET CIRCUIT BREAKER IN MAIN DASH POWER DISTRIBUTION BOX AND CIRCUIT BREAKER/FUSE IN AUXILIARY POWER DISTRIBUTION BOXES			\$21.00
324-076	DOOR ACTIVATED DOME LIGHT, UNDER DASH LIGHT WITH LH AND RH DOOR MOUNTED COURTESY LIGHTS AND LH AND RH READING LIGHTS			\$58.00
655-001	CAB DOOR LATCHES WITH MANUAL DOOR LOCKS			STD
756-1D9	PREMIUM HIGH BACK AIR SUSPENSION DRIVER SEAT WITH 3 CHAMBER AIR LUMBAR, INTEGRATED CUSHION EXTENSION, FORWARD AND REAR CUSHION TILT, ADJUSTABLE SHOCK ABSORBER	40		\$187.00
760-294	BATTERY BOX MID BACK NON SUSPENSION PASSENGER SEAT			STD
759-007	DUAL DRIVER SEAT ARMRESTS, NO PASSENGER SEAT ARMRESTS	4		\$71.00
758-022	BLACK MORDURA CLOTH DRIVER SEAT COVER			STD
761-023	BLACK MORDURA CLOTH PASSENGER SEAT COVER			STD
763-003	3 POINT DRIVER AND PASSENGER SEAT BELT RETRACTORS			STD

Prepared for:  
 Jenny Schuitz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
532-002	ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN			STD
540-005	2-SPOKE 20 INCH (500MM) BLACK STEERING WHEEL			STD
765-002	DRIVER AND PASSENGER INTERIOR SUN VISORS			STD
<b>Instruments &amp; Controls</b>				
185-002	NON-ADJUSTABLE SUSPENDED PEDALS			STD
870-004	STAR GAUGES WITH BLACK BEZELS			STD
732-001	BLACK DRIVER INSTRUMENT PANEL			STD
734-001	BLACK CENTER INSTRUMENT PANEL			STD
486-001	LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM			STD
840-002	2 INCH PRIMARY AND SECONDARY AIR PRESSURE GAUGES			STD
198-003	DASH MOUNTED AIR RESTRICTION INDICATOR WITH GRADUATIONS			\$41.00
721-001	97 DB BACKUP ALARM		3	\$82.00
149-012	CRUISE CONTROL SWITCHES IN THE CENTER PANEL			STD
156-007	KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY			STD
811-001	WARNING LAMP/LIGHT BAR DISPLAY, NON-DATA LINKED			STD
160-038	HEAVY DUTY ONBOARD DIAGNOSTICS INTERFACE CONNECTOR LOCATED BELOW LH DASH			STD
844-001	2 INCH ELECTRIC FUEL GAUGE			STD
148-003	PROGRAMMABLE RPM CONTROL - ELECTRONIC ENGINE			N/C
856-001	ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE			STD
864-001	2 INCH TRANSMISSION OIL TEMPERATURE GAUGE			STD
867-016	OUTSIDE AIR TEMPERATURE GAUGE WITH FAHRENHEIT AND CELSIUS DISPLAY MOUNTED IN OVERHEAD CONSOLE			\$126.00
852-002	ELECTRIC ENGINE OIL PRESSURE GAUGE			STD
746-1A9	AM/FM RADIO WITH FRONT AND REAR AUXILIARY INPUTS AND J1939	10		\$236.00
747-002	ROOF/OVERHEAD CONSOLE MOUNTED RADIO			N/C
750-004	(4) RADIO SPEAKERS IN CAB			N/C

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
753-019	AM/FM ANTENNA MOUNTED ON RH FRONT A-PILLAR	2		\$30.00
748-026	POWER AND GROUND WIRING FOR CB RADIO IN OVERHEAD CONSOLE			STD
752-017	MULTI-BAND AM/FM/WB/CB LH MIRROR MOUNTED ANTENNA SYSTEM			STD
810-042	ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITH ODOMETER			STD
817-008	STANDARD VEHICLE SPEED SENSOR WITH ADDITIONAL SIGNAL FOR CUSTOMER USE LOCATED BETWEEN DRIVER AND PASSENGER SEATS			\$52.00
812-001	ELECTRONIC 3000 RPM TACHOMETER			STD
813-998	NO VEHICLE PERFORMANCE MONITOR			(\$998.00)
162-002	IGNITION SWITCH CONTROLLED ENGINE STOP			STD
329-072	SIX IGNITION CONTROLLED EXTRA SWITCHES WITH INDICATOR LIGHT, 20 AMPS, WIRED BEHIND PASSENGER SEAT			\$244.00
836-001	2 INCH VOLTMETER			STD
660-008	SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY			STD
304-019	CAB MARKER LIGHT AND HEADLIGHT SWITCH WITH SEPARATE SWITCH AND TERMINALS FOR CUSTOMER FURNISHED SNOW PLOW LIGHTS			\$20.00
882-018	ONE VALVE PARKING BRAKE SYSTEM WITH DASH VALVE CONTROL AUTONEUTRAL AND WARNING INDICATOR			N/C
299-037	SELF CANCELING TURN SIGNAL SWITCH WITH INTEGRAL HEADLAMP DIMMER WITH BRAKE OVERRIDE			\$100.00
298-036	PACIFIC INSIGHT ELECTRONIC FLASHER			STD
<b>Design</b>				
065-000	PAINT: ONE SOLID COLOR			STD
<b>Color</b>				
980-612	CAB COLOR A: L3781EB VIPER RED ELITE BC			N/C
96J-001	CAB INTERIOR PAINTED SAME AS CAB COLOR			STD
986-020	BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT			STD
976-995	SUNVISOR PAINTED SAME AS CAB COLOR A			N/C
<b>Certification / Compliance</b>				
996-001	U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS			STD

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

Data Code	Description	Weight Front	Weight Rear	Retail Price
<b>Secondary Factory Options</b>				
82D-998	NO PDI INSTALLED GRILLE/HOOD TRIM			STD

**Sales Programs**  
 NO SALES PROGRAMS HAVE BEEN SELECTED

**TOTAL VEHICLE SUMMARY**

**Adjusted List Price**  
 Adjusted List Price \*\* \$181,222.00

**Weight Summary**

	Weight Front	Weight Rear	Total Weight
Factory Weight <sup>+</sup>	9178 lbs	7121 lbs	16299 lbs
<b>Total Weight<sup>+</sup></b>	<b>9178 lbs</b>	<b>7121 lbs</b>	<b>16299 lbs</b>

**ITEMS NOT INCLUDED IN ADJUSTED LIST PRICE**

**Other Factory Charges**

PMU-017	2016 OBD/2010 EPA/CARB/GHG17 ESCALATOR	\$300.00
RAM-18A	MODEL YEAR 2018 WST 4700 ESCALATOR - \$800	\$800.00
P73-2WS	STANDARD DESTINATION CHARGE	\$2,025.00

**Extended Warranty**

WAG-011	TOWING: 2 YEARS/UNLIMITED MILES/KM EXTENDED TOWING COVERAGE \$550 CAP FEX APPLIES	\$400.00
---------	---	----------

**Prepared for:**  
Jenny Schultz  
Columbus DPW  
105 N Dickason Boulevard  
Columbus, WI 53925  
Phone: 920-623-5900

**Prepared by:**  
Dylan Glindinning  
TRUCK COUNTRY OF  
WISCONSIN  
9202 N. 107TH STREET  
MILWAUKEE, WI 53224  
Phone: 4147613384

Currency Exchange Rate	1.0000
Total Extended Warranty (Local Currency)	\$400.00

(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.

(\*\*) Prices shown do not include taxes, fees, etc... "Net Equipment Selling Price" is located on the Quotation Details Proposal Report.

Prepared for:  
 Jenny Schultz  
 Columbus DPW  
 105 N Dickason Boulevard  
 Columbus, WI 53925  
 Phone: 920-623-5900

Prepared by:  
 Dylan Glindinning  
 TRUCK COUNTRY OF  
 WISCONSIN  
 9202 N. 107TH STREET  
 MILWAUKEE, WI 53224  
 Phone: 4147613384

## Q U O T A T I O N

### 4700 SET-BACK FRONT AXLE CHASSIS

SET BACK AXLE - TRUCK CUM L9 370 HP @ 2000 RPM, 2100 GOV RPM, 1250 LB/FT @ 1400 RPM ALLISON 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION MT-40-14X 40,000# R-SERIES TANDEM REAR AXLE TUFTRAC 40,000# REAR SPRING SUSPENSION DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE	20,000# FLAT LEAF FRONT SUSPENSION 110 INCH BBC STEEL CONVENTIONAL CAB 4650MM (183 INCH) WHEELBASE 1/2X3.64X11-7/8 INCH STEEL FRAME (12.7MMX301.6MM/0.5X11.88 INCH) 120KSI 1600MM (63 INCH) REAR FRAME OVERHANG PARTIAL INNER FRAME REINFORCEMENT AT FRONT SUSPENSION
--	--

		PER UNIT		TOTAL
VEHICLE PRICE	TOTAL # OF UNITS (1)	\$	96,098	\$ 96,098
EXTENDED WARRANTY		\$	400	\$ 400
DEALER INSTALLED OPTIONS		\$	0	\$ 0
<b>CUSTOMER PRICE BEFORE TAX</b>		<b>\$</b>	<b>96,498</b>	<b>\$ 96,498</b>

### TAXES AND FEES

TAXES AND FEES	\$	0	\$	0
OTHER CHARGES	\$	0	\$	0

### TRADE-IN

TRADE-IN ALLOWANCE	\$	(0)	\$	(0)
--------------------	----	-----	----	-----

BALANCE DUE	(LOCAL CURRENCY)	\$	96,498.00	\$	96,498.00
-------------	------------------	----	-----------	----	-----------

**COMMENTS:**

Projected delivery on \_\_\_ / \_\_\_ / \_\_\_ provided the order is received before \_\_\_ / \_\_\_ / \_\_\_.

**APPROVAL:**

Please indicate your acceptance of this quotation by signing below:

Customer: X \_\_\_\_\_ Date: \_\_\_ / \_\_\_ / \_\_\_.

**Daimler Truck Financial**

Financing that works for you.

See your local dealer for a competitive quote from Daimler Truck Financial, or contact us at [Information@dtoffers.com](mailto:Information@dtoffers.com).

Daimler Truck Financial offers a variety of finance, lease and insurance solutions to fit your business needs. For more information about our products and services, visit our website at [www.daimler-truckfinancial.com](http://www.daimler-truckfinancial.com).